

Introduction to Virtual Reality Part II

Alberto Borghese
Applied Intelligent Systems Laboratory (AIS-Lab)
Department of Computer Science
University of Milano



1/83

<http://borgnese.di.unimi.it>



Content



- Introduction
- Input Systems
- **Graphical Engine**
- World Generators
- Output Systems
- Applications

A.A. 2018-2019

2/83

<http://borgnese.di.unimi.it>



Graphical representation



Graphical engines represent triangles => Every shape is transformed into triangles.

- The models created by the scanners are ensembles of triangles (milions of).
- Much more than required by applications.
- RealTime application -> low poly



Mesh compression. Representation of the same geometry/pictorial attributes, with a reduced set of triangles.



VRML format -> X3D



```

#VRML V2.0 utf8
Viewpoint {
  position 0 0 3
  orientation 0 0 1 0
  fieldOfView 0
}
DirectionalLight {
  intensity 0.2
  ambientIntensity 0.2
  color 0.9 0.9 0.9
  direction 0 -1 -1
}
Group {
  children Group{
  children [
    Transform {
      children Shape {
        appearance Appearance {
          material Material {
            ambientIntensity 1
            diffuseColor 0.9 0.9 0.9
            specularColor 0 0 0
            emissiveColor 0 0 0
            shininess 0
            transparency 0
          }
        }
      }
    }
  ]
}
}
geometry IndexedFaceSet {
  coord Coordinate {
    point [
      -30.180237 -231.844711 -101.136322,
      -9.759983 -198.816086 -112.282883,
      ...
      41.981602 -72.366501 -38.740982,
      33.281391 -76.643936 -48.074211,
    ]
  }
  color Color {
    color [
      0.9 0.9 0.9,
      0.9 0.9 0.9,
      ...
      0.9 0.9 0.9,
      0.9 0.9 0.9,
    ]
  }
  coordIndex [
    10, 685, 970, -1,
    0, 1133, 1162, -1,
    ...
    263, 472, 1176, -1,
    263, 666, 1176, -1,
  ]
}
colorPerVertex TRUE
csw TRUE
solid TRUE
creaseAngle 8
}
translation 0 0 0
center 0 0 0
scale 1 1 1
}

```




Rendering


Rendering is the process that generates an image starting from the mathematical description of a 3D scene, through algorithms that define the color in each point of the digital image [Wikipedia].

Rendering is based on the physics of the (electromagnetic) waves that describes the interaction between the waves and the interacting medium, causing reflections, refraction, scattering, tunnelling effects...).

We see what is **sent back (reflected)** by the scene => The scene is lit by one or more lights (not light, no image), that is reflected by objects and hits the image plane.

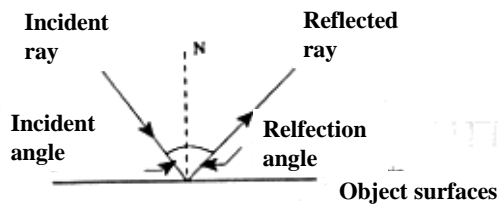


LOD models

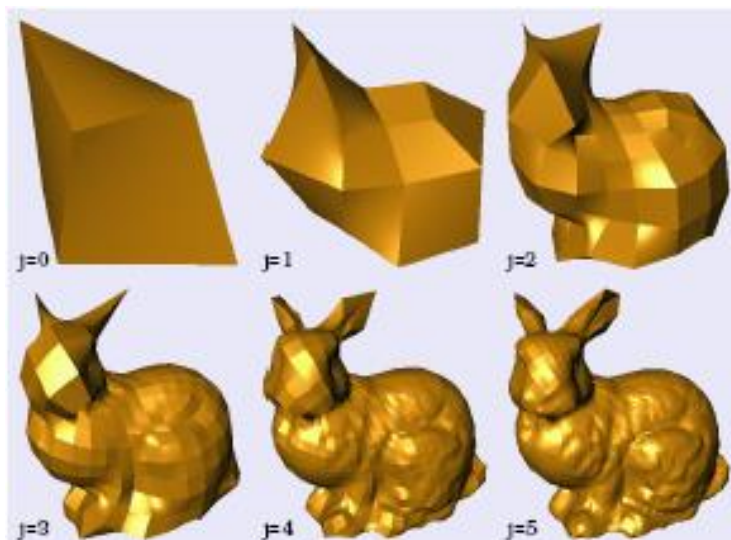



Avatar designed avoiding the "uncanny" valley

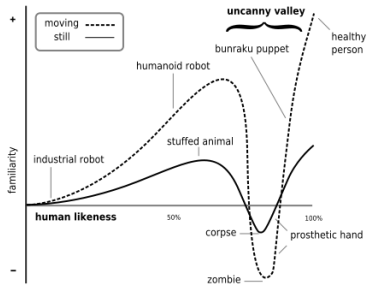

Mori, Masahiro (1970). Bukimi no tani The uncanny valley (K. F. MacDorman & T. Minato, Trans.). Energy, 7(4), 33-35. (Originally in Japanese)



A.A. 2018-2019

7/83

<http://borghese.di.unimi.it/>



Uncanny Valley



A.A. 2018-2019

8/83

<http://borghese.di.unimi.it/>



The graphical engine (visual computing)



Double buffering (for real-time visualization of 3D models) + rasterization.
Quad-buffering from VR.

Interpolation of normals direction among adjacent triangles (to create the appearance of a continuous curved surface)

Graphical pipelining (from 3D geometry to 2D images: projection, colour, texture, shadowing, ...).

Parallelization. GPU programming language (CUDA nVidia).

Hierarchy of structures (objects, collision detection...)

Multiple cache levels.

Look-ahead code optimization (compiler optimization).



Collision detection



Computational demanding ($O(n^2EF)$).

Use of multiresolution models.

Hierarchical detection.

- Geometry simplification (axes aligned faces).

- Check for common volumes.

- Extraction of the faces belonging to these volumes.

- Octree of the pairs of candidate faces.

- Check for intersection.




2D collision detection



- Collision detection with target can be checked by analyzing the overlapping between part of the motion mask only in particular regions.
- Identification of the motion mask as the outermost part of the body. Approximated collision detection defining general shapes.

Correct Hand collision area
(most left pixel in the area around first top
most high pixel)


- Collision with targets gives hit, collision with distractors gives a miss.
- Same principles implemented with Sony EyeToy Webcam (2003).




Content



- Introduction
- Input Systems
- Graphical Engine
- **World Generators**
- Output Systems
- Applications




VR - World generators



- Graphics Library:
 - OpenGL
 - DirectX
- 2D /3D Graphical Engines:
 - Realtime
 - Ogre3D
 - Irrlicht
 - SDL/SFML
 - Non Realtime
 - Renderman (PIXAR)
 - Arnold
 - Cycle (Blender)
- Software that use Graphical Engines:
 - 3D modeling
 - Blender
 - Maya
 - 3D Studio Max
 - Game Engines
 - Panda 3D
 - Unity 3D
 - Unreal

} realtime

Low level



High Level

A.A. 2018-2019

15/83

<http://borghese.di.unimi.it>



http://unity3d.com





Lara Croft go puzzle adventure



Rush game

A.A. 2018-2019

14/83

<http://borghese.di.unimi.it>



Specific SW for terrain modelization (Terragen)



Artificial landscape



<http://planetside.co.uk/products/terrigen3>



Video on Vajont history



3D Assets making



- Scanners 3D (copying from reality)
 - Active (laser or unstructured light, sound)
 - Passive (video)
- Modelling
 - Organic
 - Non organic
- Procedural content generation

A.A. 2018-2019

17/83

<http://borghese.di.unimi.it/>



3D Scanner: Autoscan - 1997



- Manual scanning through a laser pointer,
- Real-time display feed-back to guide scanning.
- Flexible set-up and portability
- Acquisition of laser spot in real-time at 100 Hz. (max 100 points / sec)
3D reconstruction of the spot through triangulation poses problems due to noise on the measurement of position on the cameras.

A.A. 2018-2019

18/83

<http://borghese.di.unimi.it/>



Models from range data



Cyberware whole body scanner, WB4



Which problems do you envisage?

A.A. 2018-2019

19/83

<http://borghese.di.unimi.it>



Models from range data (II)



Cyberware smaller model
3030



A.A. 2018-2019

20/83

<http://borghese.di.unimi.it>



Models from range data (IV)



Digibot II.

- Platform rotates
- Scanner line translates.



 MINOLTA
Scanner Laser 3d



Minolta scanner 3D



http://kmpi.konicaminolta.us/eprise/main/kmpi/content/ISD/ISD_Category_Pages/3dscanners




3D structure from range data (III)



Polhemus hand held laser scanner



From Clouds to surfaces



Effect of measurement noise is clear with Delaunay triangulation.
Need of filtering is evident.



3D structure from points





Linear approximation (mesh):

- Delauney triangulation (Watson, 1981; Fang and Piegl, 1992). Direct tessellation (no filtering).
- Alpha shapes, Ball Pivoting (Bernardini et al., 2000), Power Crust (median axis transform, Amenta, 2002). Post processing to regularize a Delauney tessellation.

Surface fitting to range data

- Snakes (Kass et al., 1988). Energy based approach. Best curves.
- Kohonen maps (1990).
- Radial Basis Functions Networks (Poggio and Girosi, 1995; Ferrari et al. 2005, semi-parametric models, incremental approach).
- Support Vector Regression (SVR, A.Smola and B.Scholkopf)

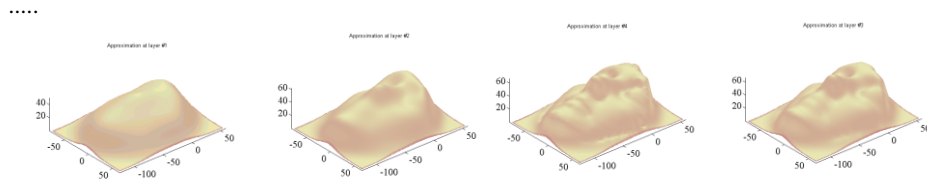


A.A. 2018-2019

25/83

<http://borghese.di.unimi.it>



Scanner 3D modern pipeline

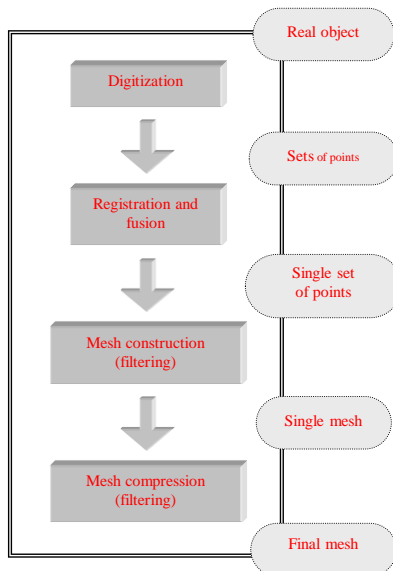

M. Levoy, S. Rusinkiewicz, M. Ginzton, J. Ginsberg, K. Pulli, D. Koller, S. Anderson, J. Shade, B. Curless, L. Pereira, J. Davis and D. Fulk, "The Digital Michelangelo Project: 3D Scanning of Large Statues," *Proc. Siggraph'99*, ACM Press, pp. 121-132, 1999

A.A. 2018-2019

26/83

<http://borghese.di.unimi.it>



Research challenges Digital Michelangelo project



- vision problems
 - aligning and merging scans
 - automatic hole filling
 - inverse color rendering
 - automated view planning
 - Interaction of laser with marble
- digital archiving problems
 - making the data last forever
 - robust 3D digital watermarking
 - indexing and searching 3D data
 - real-time viewing on low-cost PCs

A.A. 2018-2019

27/83

<http://borghese.di.unimi.it>



Video-based 3D scanner (Rusinkiewicz et al., 2002)


- A projector of stripes with pseudo-random width and a video camera
- holes can be found and filled on-the-fly
- object or scanner can be handheld / shoulderheld



video frame



range data

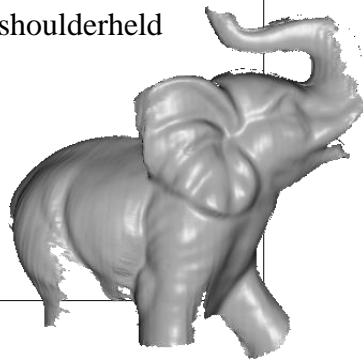

merged model
(159 frames)

A.A. 2018-2019

28/83

<http://borghese.di.unimi.it>



Kinect fusion

<http://blogs.msdn.com/b/kinectforwindows/archive/2012/11/05/kinect-fusion-coming-to-kinect-for-windows.aspx>



Low cost 3D modeling

**KinectFusion: Real-time 3D
Reconstruction and Interaction
Using a Moving Depth Camera, Izadi et al.,
Proc. Siggraph 2011**



Procedural Modelling

Models generated through a procedure (a software program, an algorithm)

It is possible to construct a 3D mesh specifying parametric rules to create the objects.

Examples: Trees, Cities, Mugs,



Artificial plants



A synthetic model of the topiary garden at Levens Hall, England, by

R. Mëch, P. Prusinkiewicz, and M. James. "Garden of L" (inset) by P. Prusinkiewicz,

F. Fracchia, J. Hanan, and D. Fowler; see www.cpsc.ucalgary.ca/~pwp

L-systems

<http://borghese.di.unimi.it>



Realizing a plant



Lindenmayer example

variables : X F

constants : + - []

start : X

rules : $(X \rightarrow F - [[X] + X] + F [+FX] - X), (F \rightarrow FF)$

angle : 25°

Here, F means "draw forward", - means "turn left 25°", and + means "turn right 25°". X does not correspond to any drawing action and is used to control the evolution of the curve.

[corresponds to saving the current values for position and angle, which are restored when the corresponding] is executed.





Content



- Introduction
- Input Systems
- Graphical Engine
- World Generators
- **Output Systems**
- Applications



Haptic displays



Convey to the subject the sensorial information generated in the interaction with the virtual objects: force, material texture...

Measure the force exerted by the subject on the virtual environment.

Haptic displays provide a mechanical interface for Virtual Reality applications.

Most important developments have been made in the robotics field.

International Haptic society - <http://www.isfh.org/>



Direct drive manipulandum (phantom)



A similar device (Falcon) is available and used in our lab for rehabilitation



Haptics low cost



Omni Phantom



Novint Falcon

Experience in the lab



Requirements of Haptic displays



- Large bandwidth.
- Low inertial and viscosity.


Technological solutions (oggetto intermediario):

- Direct drive manipulandum (Yoshikawa, 1990), Phantom (2000).
- Parallel manipulandum (Millman and Colgate, 1991; Buttolo and Hannaford, 1995).
- Magnetic levitation devices (Salcudean and Yan, 1994; Gomi and Kawato, 1996).
- Gloves and esoskeleta (Bergamasco, 1993, MITmanus, 2000, Braccio di ferro, 2007).

A.A. 2018-2019

38/83

<http://borghese.di.unimi.it>

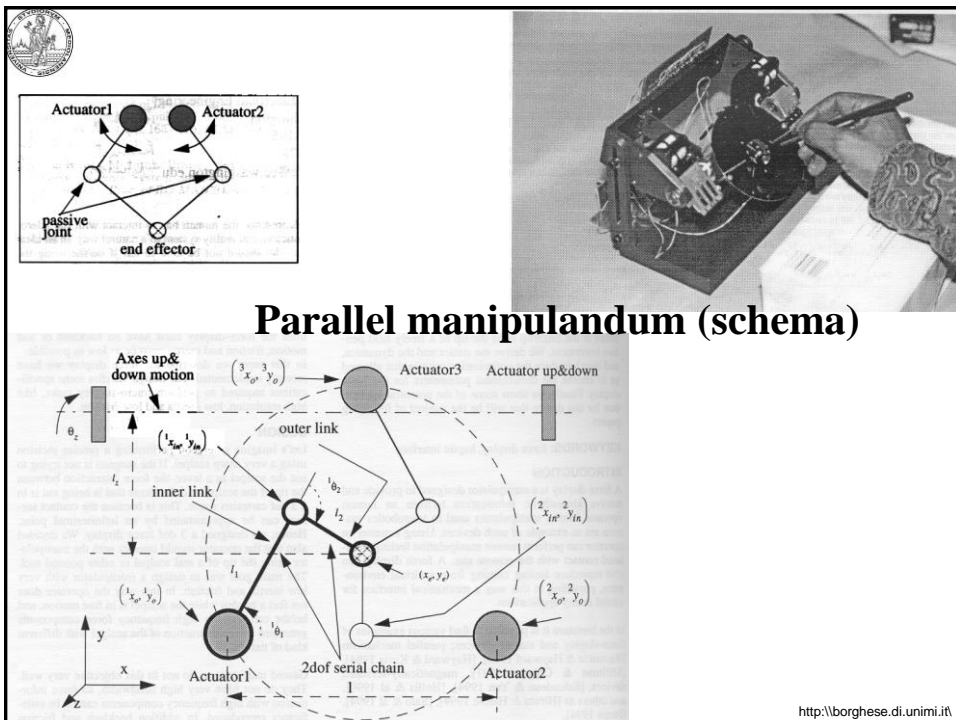

<http://borghese.di.unimi.it>



MIT-Manus, 2004




Braccio di ferro, 2010



Support for the fore-arm, and generation of a force field.



Gloves (Blackfinger, 2000)

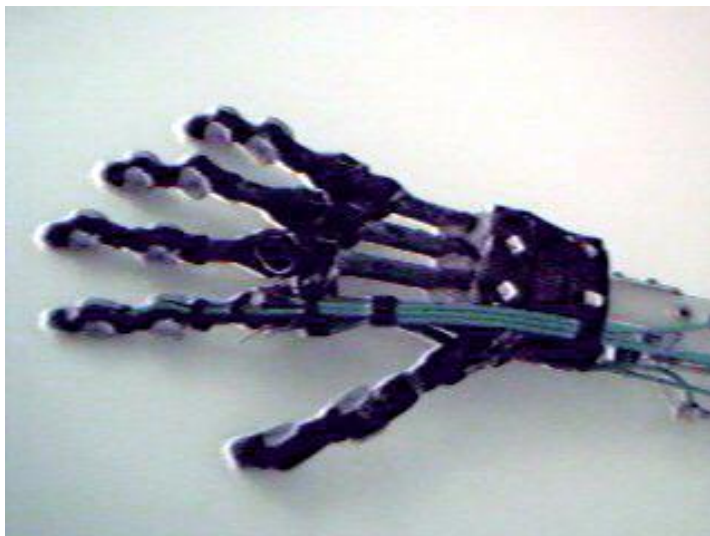



Percro glove (2002)



Sensori goniometrici – non devono essere calibrati sulla lunghezza delle falangi.

<http://www.percro.org>

A.A. 2018-2019

42/83

<http://borghese.di.unimi.it>



Tactile Stimulators



Cyber touch:

- 6 vibrators, 1 for each finger + 1 on palm
- Vibration frequency: 0-125 Hz.
- Vibration amplitude: 1.2 N @ 125 Hz (max).

Iwamoto & Shinoda
University of Tokio



A.A. 2018-2019

43/83

<http://borghese.di.unimi.it>




Other output devices



Audio – Stereo, sound spatialization.

Olfactory – Virtual nose



Type	Sensitive material	Detection principle
semiconducting metal oxides (M.O.S., Taguchi)	doped semiconducting metal oxides (SnO ₂ , GaO)	resistance change
quartz crystal microbalance, QMB surface acoustic wave, SAW	organic or inorganic layers (gas chromatography)	frequency change due to mass change
conducting polymers	modified conducting polymers	resistance change
catalytic field-effect sensors (MOSFET)	catalytic metals	workfunction change
pellistor	catalysts	temperature change due to chemical reactions
fluorescence sensors	organic dyes	light intensity changes
electrochemical cells	solid or liquid electrolytes	current or voltage change
infra red sensors	-	IR absorption



The future?





Sistemi di Output::visione



A.A. 2018-2019

<http://borghese.di.unimi.it/>



Optical Output systems



Requirements for the monitor:

- Large field of view ($180^\circ \times 150^\circ$).
- High spatial resolution (35 pixels/degree, equivalent to 12,000x12,000 pixels for a 19" display positioned at 70cm from the viewer).

Requirements for the world generator:

- Stereoscopic vision for objects with $D < 10m$.
- Monocular cues for objects with $D > 10m$.
 - - Occlusions.
 - - Geometrical perspective and a-priori model knowledge.
 - - Shading.
 - - Motion.


A.A. 2018-2019

47/83

<http://borghese.di.unimi.it/>




Human eye

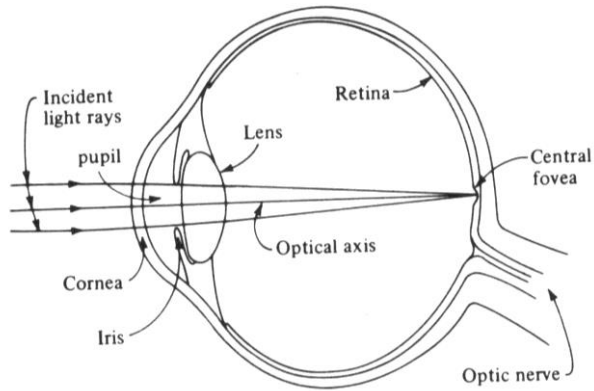

Its behavior is very similar to that of a camera
 Lens focuses the image, vergence movement orients the eye.



Stereo-disparity

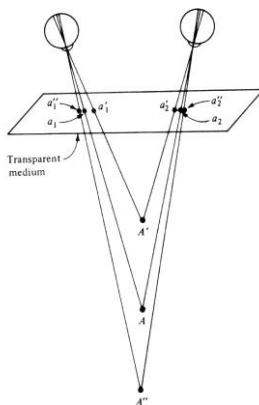


Points further away are projected on points closer to the image center.

Vergence and focusing are strictly connected.

Also monocular cues: shading, apparent size,



Autostereogram

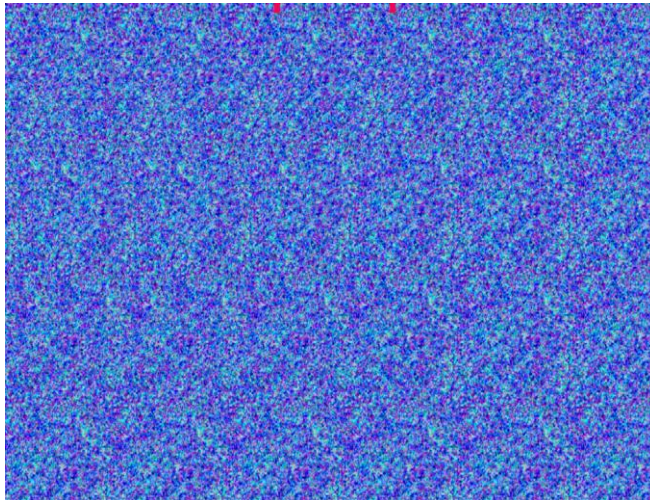

To see the 3D image, you need to relax and to try to view "through" the image (focusing at infinity)

A.A. 2018-2019

50/83

<http://borghese.di.unimi.it/>



Passive stereo




A.A. 2018-2019

51/83

<http://borghese.di.unimi.it/>



Stereo image for passive stereo

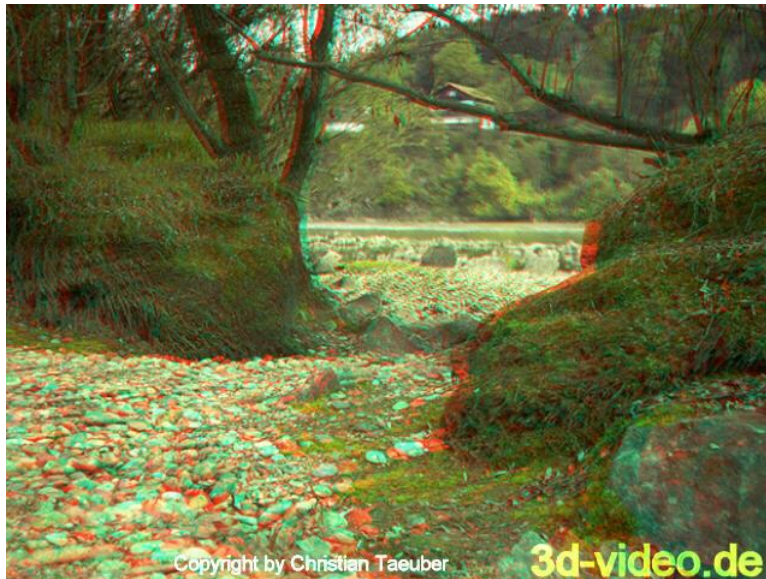

Copyright by Christian Taeuber

3d-video.de

A.A. 2018-2019

52/83


<http://borghese.di.unimi.it/>



Stereogram through parallax



Patent of 1903

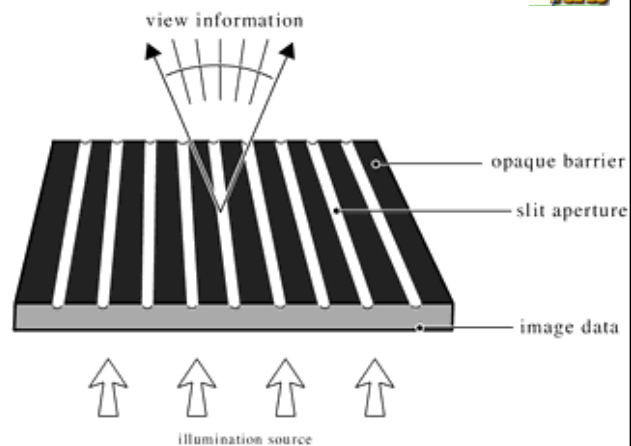

The image is subdivided into vertical stripes.

Pairs of stripes congruent with a given angle of view are positioned in the proper columns under the lens.


A.A. 2018-2019

53/83

<http://borghese.di.unimi.it/>



Display Autostereoscopici

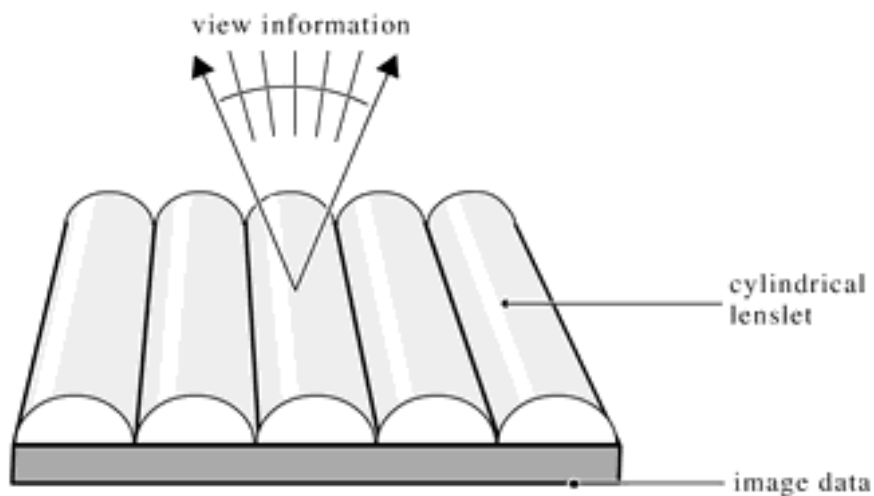

A.A. 2018-2019

54/83

<http://borghese.di.unimi.it>



Output devices (eye-glasses)



Semi-immersive: Eye-glasses (video accuracy, but user is not allowed to move, lateral vision is permitted, which limits virtual realism).




A.A. 2018-2019

55/83

<http://borghese.di.unimi.it>



I-glasses (games)

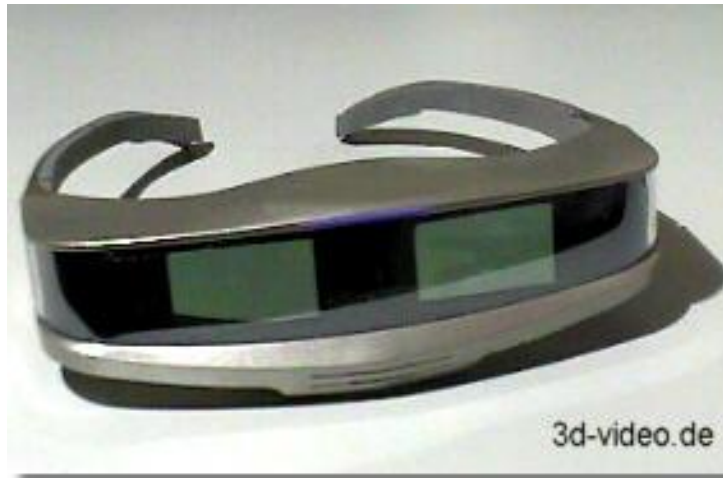

A.A. 2018-2019

56/83

<http://borghese.di.unimi.it/>



HMD (n-vision)



Up to 1280 x 1024, 180Hz.
Time multiplexing.

A.A. 2018-2019

57/83

<http://borghese.di.unimi.it/>



Output devices (BOOM HMD)



Up to 1280 x 1024 pixels / eye
CRT Technology
Head tracking is integrated.



A.A. 2018-2019

58/83

<http://borghese.di.unimi.it/>



CAVE



Room 2.5m x 2.5m
with Virtual images
(stereoscopic) projected
onto its walls.

More people and
Complete immersivity.



A.A. 2018-2019

59/83

<http://borghese.di.unimi.it/>



Oculus Rift novel HMD: a new hype



Thesis
Available



Experience in the lab

<http://www.oculusvr.com/>

A.A. 2018-2019

60/83


<http://borghese.di.unimi.it>



Responsive work-bench (Strauss et al., 1995)



Virtual 3D objects are positioned on a working table. They are created projecting the stereo images over the table surface.

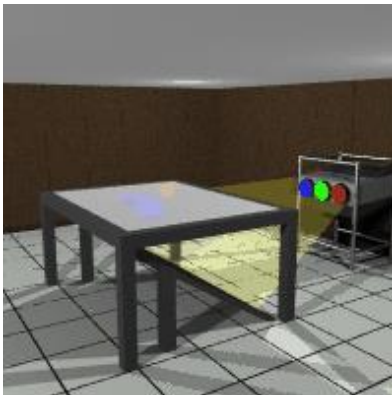

A.A. 2018-2019

61/83

<http://borghese.di.unimi.it>



Large screen displays (with or without stereo – see Graphics Lab in Celoria)



Workwall



A.A. 2018-2019

<http://borghese.di.unimi.it>



Content



- Introduction
- Input Systems
- Graphical Engine
- World Generators
- Output Systems
- **Applications**

A.A. 2018-2019

63/83

<http://borghese.di.unimi.it>



Applications



- Army
- Medicine
- Industry (inspection, virtual prototyping)
- Chemistry and Physics
- Virtual theaters and theme parks
- Entertainment
- Communication
- Engineering, Ergonomics and Architecture (Visual computing).
- History.



Nefertari





Virtual mannequin



Cf. EPFL

A.A. 2018-2019

66/83



<http://borghese.di.unimi.it/>



Wearable devices – input / output



Characteristics: mobile, context sensitive, augmented reality.

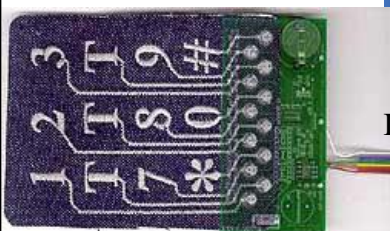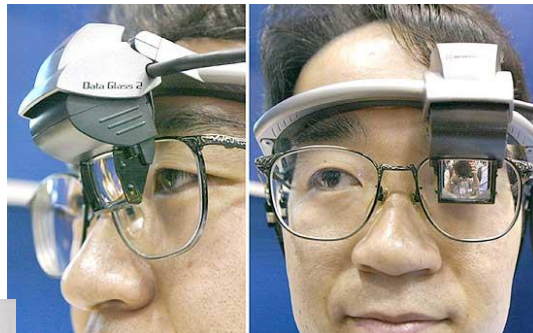

Interface on cloth

67/83

<http://borghese.di.unimi.it/>



Design: virtual industrial plans




A.A. 2018-2019

68/83

<http://borghese.di.unimi.it>



Design: virtual engines

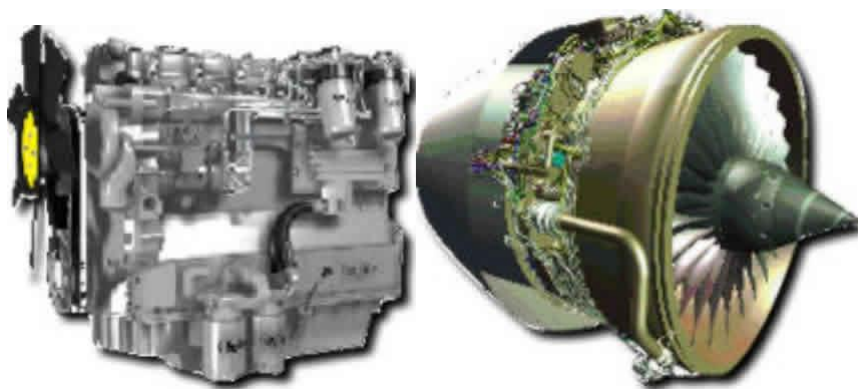


A.A. 2018-2019

69/83

<http://borghese.di.unimi.it>



Human Factors

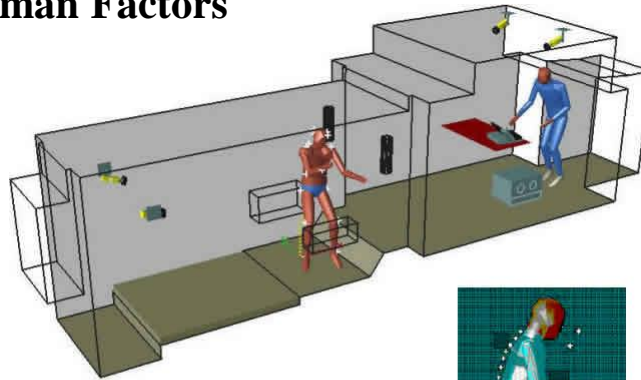


A.A. 2018-2019

70/83

<http://borghese.di.unimi.it/>



Assisted surgery

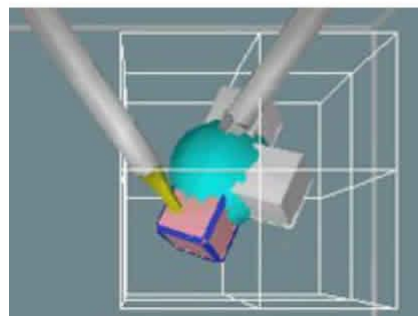




A.A. 2018-2019

71/83

<http://borghese.di.unimi.it/>



Surgery planning through imaging



A.A. 2018-2019

72/83

<http://borghese.di.unimi.it>



Imaging and 3D printing



Acrylic mandible realized with CAD-CAM technology from CAT images


A.A. 2018-2019

73/83

<http://borghese.di.unimi.it>



Virtual anatomy

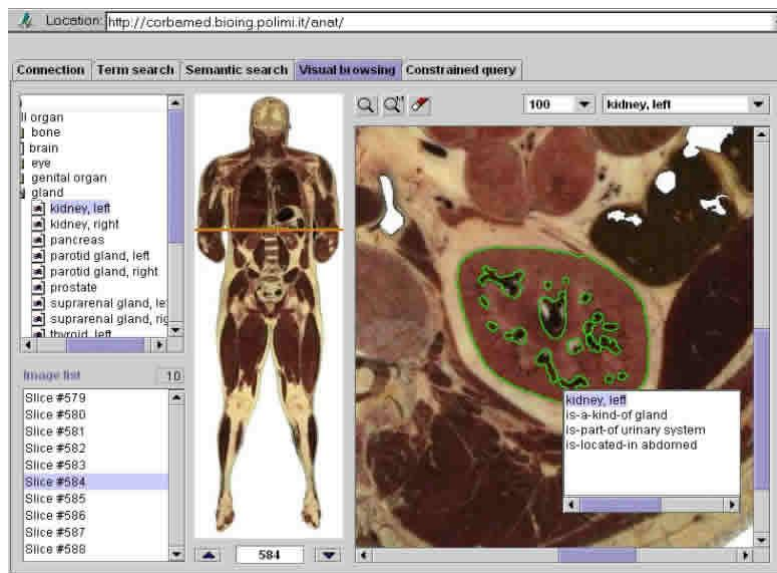

A.A. 2018-2019

74/83

<http://borghese.di.unimi.it>



Augmented Reality – Camera movement from video



Applications for smart phone (Vuforia)

A.A. 2018-2019

75/83

<http://borghese.di.unimi.it>



Augmented Reality through hololens



A new vision for computing, built on a history of innovation

<https://www.microsoft.com/da-DK/hololens>

Experience in the lab



Clinical Motion Analysis




MOTION ANALYSER

FORCE TRANSDUCER

MATHEMATICAL MODELS

EMG

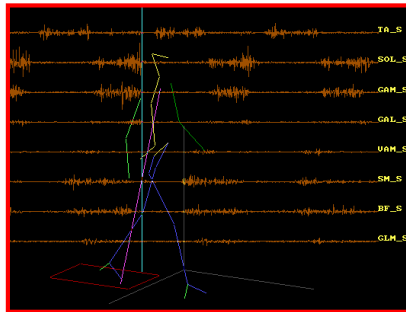

JOINT KINEMATICS

JOINT KINETICS


EXTERNAL FORCES

PLANTAR PRESSION

MUSCLE ACTIVATION AND FORCE



Rehabilitation through VR: Rewire project

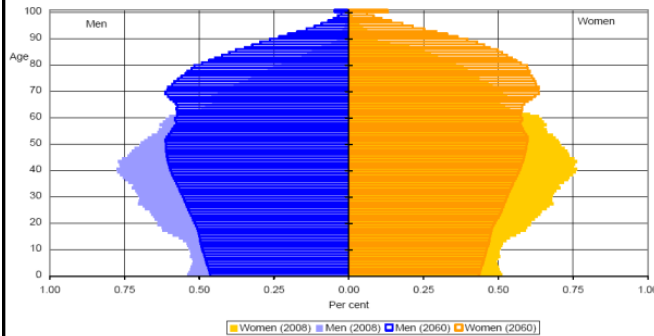

Source: Eurostat, EUROPOP2008 convergence scenario

- Increase of rehabilitation need.
- National health providers are facing budget cuts.
- Prolonged intensive rehabilitation allows recovering and/or maintaining health conditions.
- Remote patients can be addressed

ICT recent developments have made possible facing the challenge

<http://www.rewire-project.eu>

A.A. 2018-2019

78/83

<http://borghese.di.unimi.it>



REWIRE's 3-levels platform



A.A. 2018-2019

79/83

<http://borghese.di.unimi.it>



IGER – Intelligent Game Engine for rehabilitation



Adaptation




Monitoring



IGER – NUI interfacing



NUI interfacing

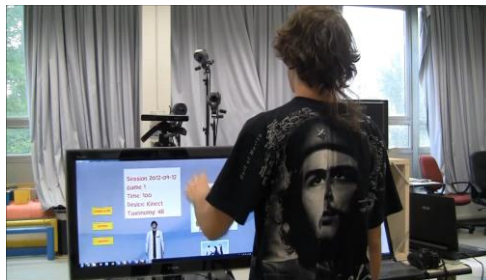

NUI interfacing
Speech recognition



Virtual Tosca



Content



- Introduction
- Input Systems
- World Generators
- Graphical Engine
- Output Systems
- Conclusions