




Introduction to Virtual Reality

Alberto Borghese
Department of Computer Science
University of Milano



Which is real, which is virtual?

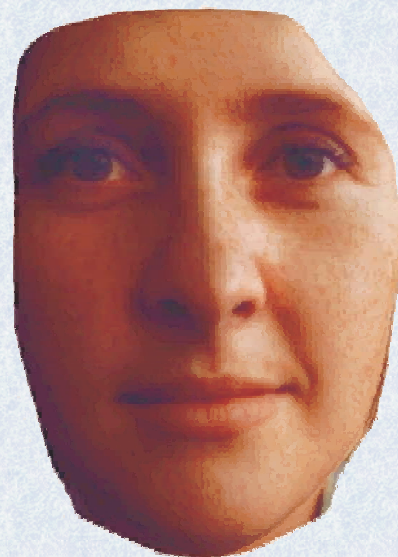



Historical Perspective



- *Virtual Worlds or Synthetic Environments*
- *Philosophical and Technological origin.*

Philosophical background

Ontology and Gnoseology.

- Plato (world of the ideas) 428-348 a.C.
- Berkeley (sensorial experience is too limited) 1685-1753.
- Hegel (“what is rational is real..”) 1770-1831.
- New age.



Historical Perspective (II)



Technological background

- *Philco HMD, 1961.*
- *“Ultimate display”, Sutherland, 1970.*
- *Data Glove, VPL Research, 1988.*



Virtual Reality Systems



Key characteristics are:

Immersivity.

Interactivity.

VR should be able to stimulate the human sensorial systems
In a coordinated way.



A typical VR system



VR systems are constituted of:

- *Input systems* (measure the position *in* the environment and force *over* the environment).
- *World generators* (provides a realistic virtual world in which to act).
- *Graphical engine* (computes the output, given the input and the virtual world).
- *Output systems* (outputs sensorial stimuli *on* the subject. Vision, sound, force ... are generated as if they were provided *by* the virtual environment).



Components of a VR system



- *Input systems.*
- *World generators.*
- *Graphical engine.*
- *Output systems.*



Input systems



Measure human actions on the virtual environment.

- **Position.** Measure the position of the body segments inside the virtual environment.
- **Force.** Measure the force exerted by the body segments when in contact with a virtual object.
- **Estimate the motor output of the human muscle-skeleton system.**



Position systems




- Measure the position of the body segments inside the virtual environment.
- Motion capture (batch, complete information on the movement).
- Real-time trackers (real-time position).
- Gloves (specialized for hands).
- Gaze trackers.

Adopted technology

- Optoelectronics
 - Marker based
 - Computer vision.
- Magnetical
- Acoustical
- Mechanical



Edgar Muybridge (1896)

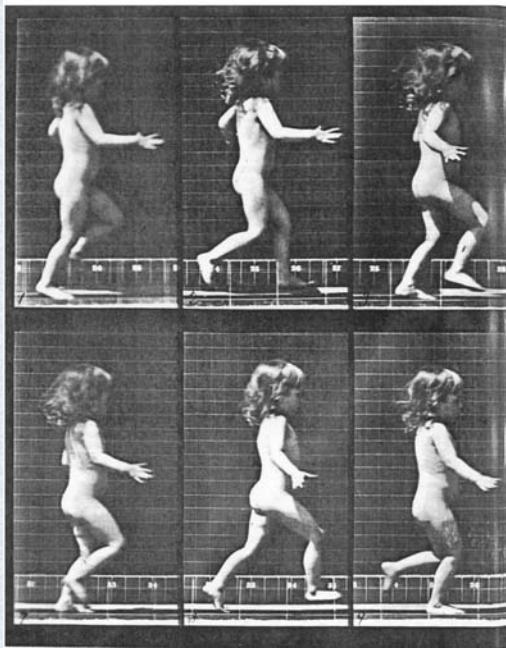



Optical systems (computer vision)



- **Advantage:** complete freedom of motion to the subjects. The scene is surveyed by standard videocameras.
- **Disadvantage:** ill-posed problems (high sensitivity to limited resolution, noise and lighting conditions).
- **Solution:** hierarchical multi-stage processing.



Pipe-line of processing in CV systems



Reference: Cipolla and Pentland eds., Computer Vision for Human-Machine Interaction, Cambridge University Press, 1998.

- **First level:** Features detection.
 - Background subtraction (Sturman and Zelter, 1994; Di Bernardo et al., 1995);
 - Optical flow (Barron et al., 1995);
 - Template matching (Borghese et al., 1990; Tomasi and Kanade, 1991);

Second level: Features matching.
(Xu and Ahuja, 1994; Shashua, 1999, Weng, 2000, Gruen, 1985);




Pipe-line of processing in CV systems



(II)

- **Third level:** 3D Reconstruction.

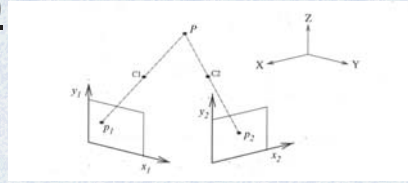

- **Fourth level:** Model matching.

- Silhouette matching (Moezzi et al., 1996);
- 3D polygonal structures
 - Marching cube (Lorenson and Cline, 1987);
 - Snakes (Kass et al., 1988);
- Matching 3D structures
 - Facial models (Parke, 1996);
 - Superquadrics (Metaxis and Terzopoulos, 1991);




Video from the group of Jain




Optical systems – marker based




They are based on modeling human body as a skeleton (Pedotti, 1977).

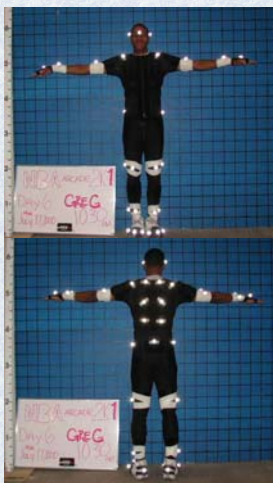


Markered subject

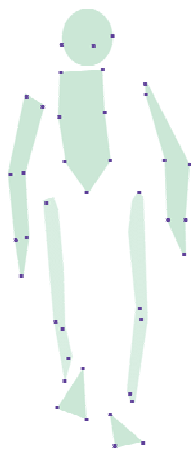

3D model

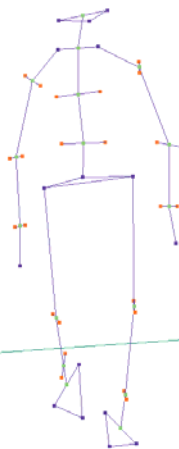

Stick diagram

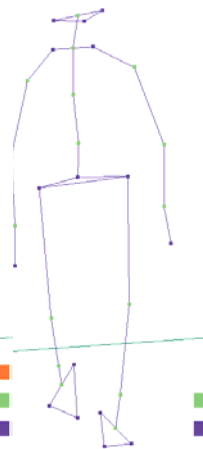

Hidden model



Passive optical markers - processing



First step. Detection of the 2D position of the markers.

Thresholding (Vicon, Motion Analysis, MacReflex)

Correlation (Elite)

Second step. Matching the same marker on the different cameras.

Third step. Reconstruction of the 3D position of the marker.

Fourth step. Classification of the markers according to the model of the subject.



Video on the Elite system



Optical systems – marker based (II)



Advantage: High reliability in the identification of the markers (joints).

Disadvantages: Markers have to be attached to the subject before the motion. Wires carried by the subject in case of active markers.

Active vs. Passive markers technology

- Active markers – LED, or magnets, with wires, time multiplexing, high sampling frequency, with few markers, minimal processing.
- Passive markers – Small pieces of retro-reflective paper, Videocameras (video rates), complex data processing from image processing to 3D reconstruction.



Active markers



Magnetic trackers

- Electromagnetic induction. Magnetic material which is moved inside an electric field, with variable frequency. Isotrack, FastTrack and Flock of birds.
- A DSP is incorporated for time filtering.
- Maximum range: 1m.

Problems

- Distortions and linearity.
- Interference of metallic materials.

Optoelectronics active markers

- LED – Selspot, Watsmart, Optotrack.



Motion capture for animation



- Motion capture
- Definition of a 3D model.
- Mapping of the motion onto the 3D model.
- Animation.

Video by Superfluo



Gloves



Monitor fingers position and force.

Problems with the motion of the fingers:

- overlap.
- fine movements.
- fast movements.
- rich repertoire.



Sayre glove (1976)





MIT glove (1977)



Laboratory of Motion Analysis & Virtual Reality, MAVR

<http://mavr.dsi.unimi.it>



Digital Data Entry Glove (1983)



Laboratory of Motion Analysis & Virtual Reality, MAVR

<http://mavr.dsi.unimi.it>



Data Glove (1987)




Laboratory of Motion Analysis & Virtual Reality, MAVR

<http://mavr.dsi.unimi.it>



Power Glove (1990)

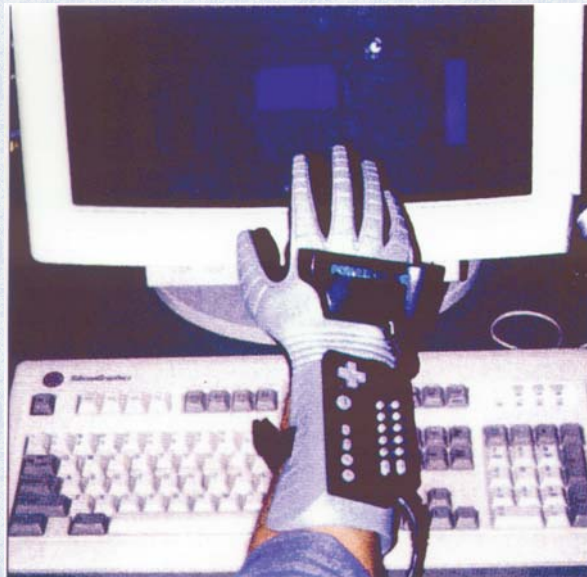


Laboratory of Motion Analysis & Virtual Reality, MAVR

<http://mavr.dsi.unimi.it>



Cyber Glove (1995)

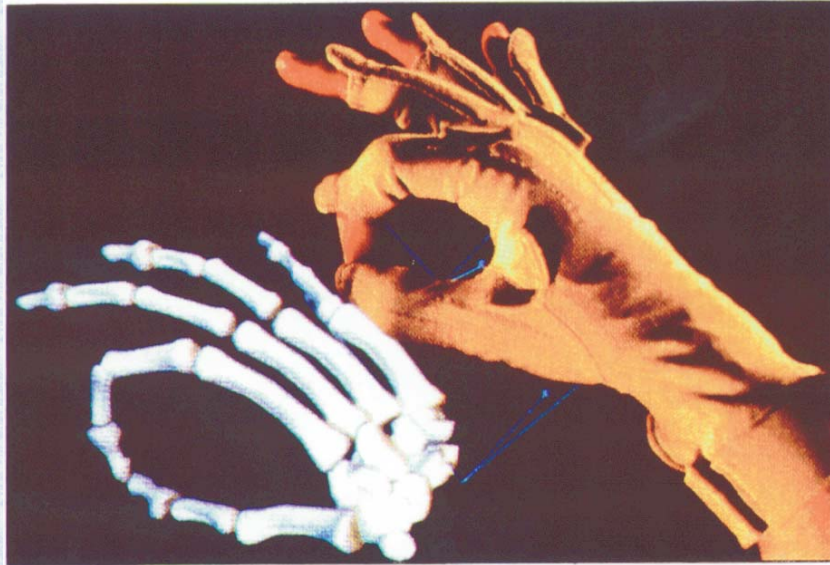

Calibration



Estimate of the geometrical parameters in the transformation operated by the sensors (e.g. the perspective transformation operated by a video-camera).

Estimate of the parameters, which describe distortions introduced by the measurement system.

Measurement of a known pattern. From its distortion, the parameters can be computed.

Algorithms adopted: polynomial, local correction (neural networks, fuzzy).



Haptic displays



Convey to the subject the sensorial information generated in the interaction with the virtual objects: force, material texture...

Measure the force exerted by the subject on the virtual environment.

Aptic displays provide a mechanical interface for Virtual Reality applications.

Most important developments have been made in the robotics field.



Requirements of aptic displays



- Large bandwidth.
- Low inertial and viscosity.

Technological solutions:

- Direct drive manipulandum (Yoshikawa, 1990), Phantom (2000).
- Parallel manipulandum (Millman and Colgate, 1991; Buttolo and Hannaford, 1995).
- Magnetic levitation devices (Salcudean and Yan, 1994; Gomi and Kawato, 1996).
- Gloves (Bergamasco, 1993).



Direct drive manipulandum (phantom)





Laboratory of Motion Analysis & Virtual Reality, MAVR

<http://mavr.dsi.unimi.it>



Parallel manipulandum (schema)

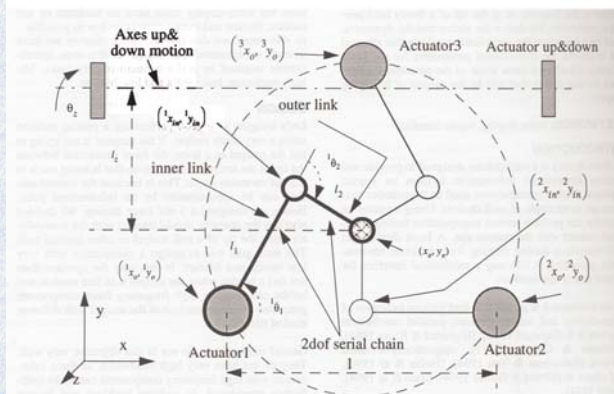


Laboratory of Motion Analysis & Virtual Reality, MAVR

<http://mavr.dsi.unimi.it>



Pen aptic display

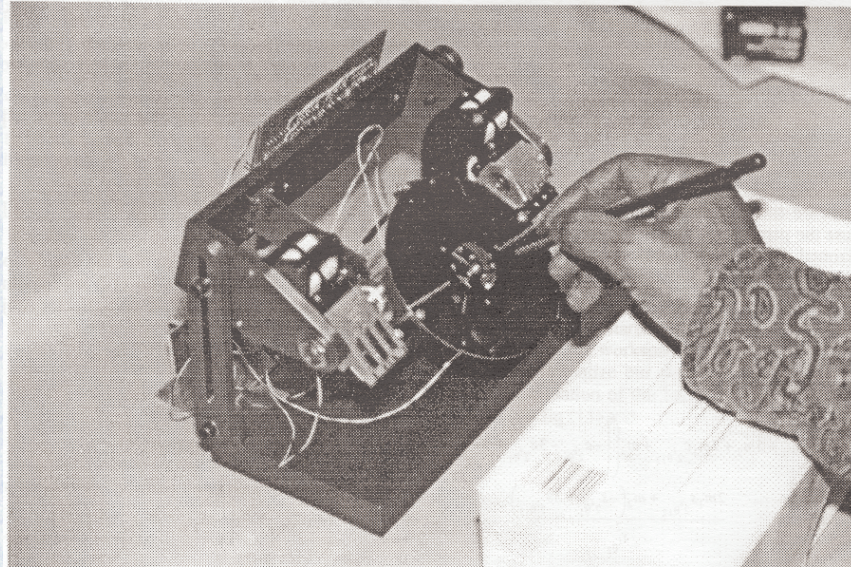


Laboratory of Motion Analysis & Virtual Reality, MAVR

<http://mavr.dsi.unimi.it>



Gloves (blackfinger, 2000)

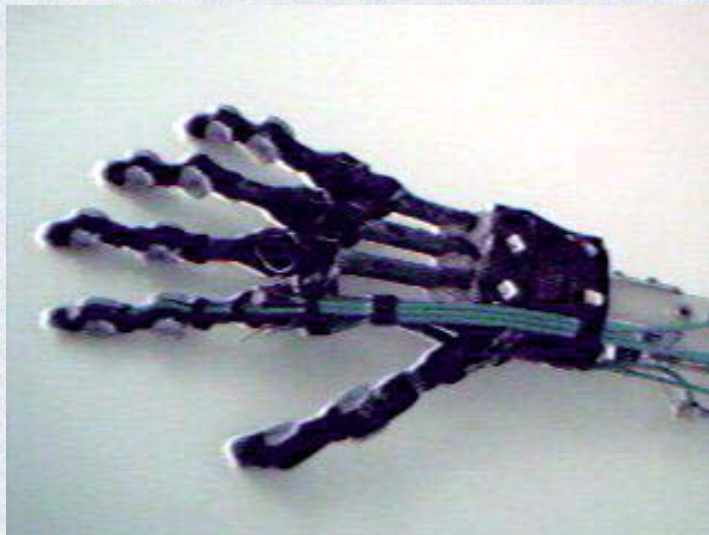


Laboratory of Motion Analysis & Virtual Reality, MAVR

<http://mavr.dsi.unimi.it>




Percro gloves (Begamasco, 1993)

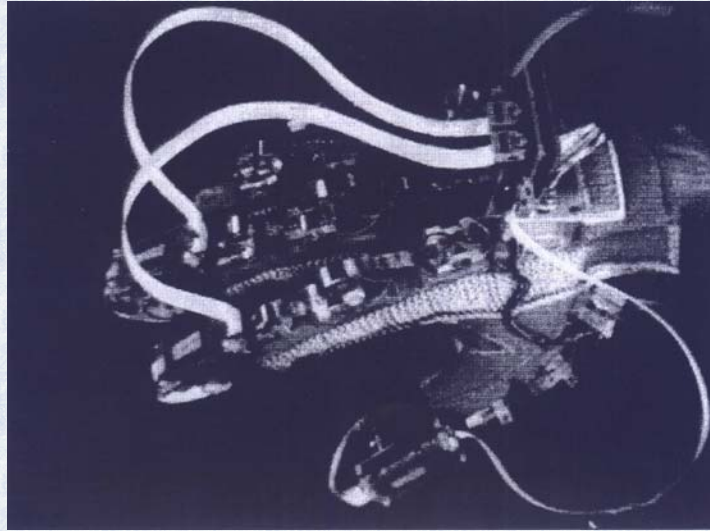

Gaze input



- Contact lenses carrying magnetic coils.
- Tv cameras aligned with an IR LED source.
- Stereoscopic eye-wear.
 - The direction of gaze is decided by measuring the shape of the spot reflected by the frontal portion of the cornea (Ohshima et al., 1996).

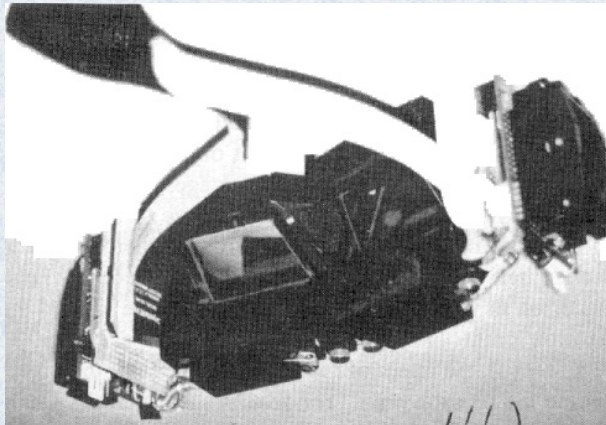



Introduction to Virtual Reality

Alberto Borghese
Department of Computer Science
University of Milano



Components of a VR system

- *Input systems.*
- *World generators.*
- *Graphical engine.*
- *Output systems.*



World generators



Integrated systems for 3D CAD and Animation:

- Maya (ex-Alias/Wavefront)
- XSI (ex-Softimage)
- 3D Studio Max.

- 3D Structure.
- Colour and Texture
- Motion (animation)
- Rendering (lights, shadows)



3D structure



Solid modeling

- 3D geometric solids: cubes, cylinders, cones...
- Superquadrics (Terzopoulos and Metaxas, 1991): global parameters + local parameters.
- Revolution surfaces.
- NURBS (Piegle, 1993). CAD, high interactivity.

Surface fitting to range data

- Snakes (Kass et al., 1988). Energy based approach. Best curves.
- Kohonen maps (1990).
- Radial Basis Functions Networks (Poggio and Girosi, 1995; Borghese and Ferrari, 1998).



3D structure (II)



Linear approximation (mesh):

- Delauney triangulation (Watson, 1981; Fang and Piegl, 1992). Direct tessellation.
- Alpha shapes, ball pivoting (Bernardini et al., 2000). Post processing to regularize a Delauney tessellation.
- Polymesh models (Singh et al., 1995).

Finite element models

- It is a class per sé. Local modeling. Mechanical modeling.
- Largely used for animation in medicine (facial animation, deformation of tissue during surgery). Multi-layer modeling.



Models from range data



Cyberware whole body scanner, WB4





Models from range data (II)



Cyberware smaller model
3030



3D structure from range data (III)



Polhemus hand held laser scanner



Models from range data (IV)



Digibot II.

- Platform rotates
- Scanner line translates.



Graphical representation



Graphical engines represent triangles => Every shape is transformed into triangles.

- The models created by the scanners are ensembles of triangles (millions of).
- Much more than required by applications.



Mesh compression. Representation of the same geometry/pictorial attributes, with a reduced set of triangles.



Gaze directed rendering



Video from Ohshima et al., 1996.



Components of a VR system



- *Input systems.*
- *World generators.*
- ***Graphical engine.***
- *Output systems.*



The graphical engine (visual computing)



Parallelization (graphical boards, SIMD architectures on Pentium IV).

Multiple cache levels.

Pipelining (graphical and computational).

Look-ahead code optimization (compiler optimization).

Hardware acceleration of graphical operations (OpenGL, texture mapping...).

Double buffering (for real-time visualization of 3D models).



Collision detection



Computational demanding ($O(n^2EF)$).

Use of multiresolution models.

Hierarchical detection.

- Geometry simplification (axes aligned faces).

- Check for common volumes.

- Extraction of the faces belonging to these volumes.

- Octree of the pairs of candidate faces.

- Check for intersection.

Video from the group of Smith



Animation



- Key-frame animation.
- Motion capture.
- Dynamic animation.

Video from Softimage (now XSI)



Components of a VR system



- *Input systems.*
- *World generators.*
- *Graphical engine.*
- *Output systems.*



Output systems



Requirements for the monitor:


- Large field of view ($180^\circ \times 150^\circ$).
- High spatial resolution (35 pixels/degree, equivalent to 12,000x12,000 pixels for a 19" display positioned at 70cm from the viewer).

Requirements for the world generator:

- Stereoscopic vision for objects with $D < 10m$.
- Monocular cues for objects with $D > 10m$.
 - - Occlusions.
 - - Geometrical perspective and a-priori model knowledge.
 - - Shading.
 - - Motion.




The human eye

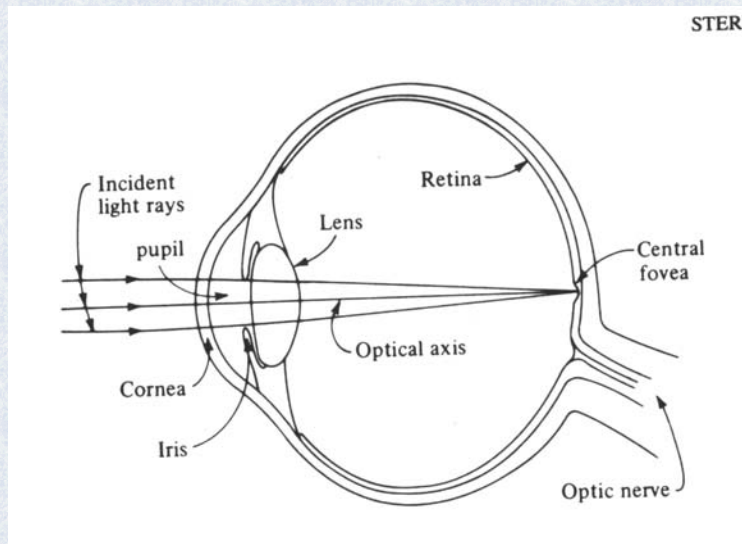

Its behavior is very similar to that of a photocamera



Stereo-disparity

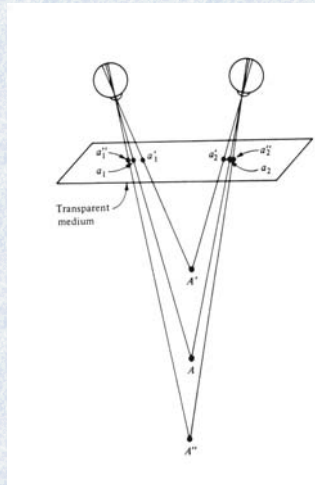

Points further away are projected on points closer to the image center.

Vergence and focusing are strictly connected.




Passive stereo





Stereo image for passive stereo

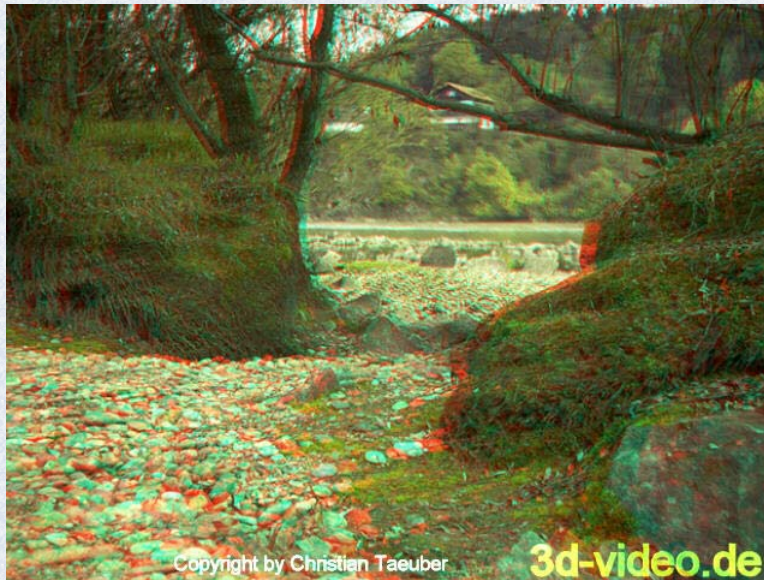

Copyright by Christian Taeuber

3d-video.de



Output devices (eye-glasses)



Semi-immersive: Eye-glasses (video accuracy, but user is not allowed to move, lateral vision is permitted, which limits virtual realism).





HMD (n-vision)




Up to 1280 x 1024, 180Hz.
Time multiplexing.



Output devices (BOOM HMD)




Up to 1280 x 1024 pixels / eye
CRT Technology
Head tracking is integrated.

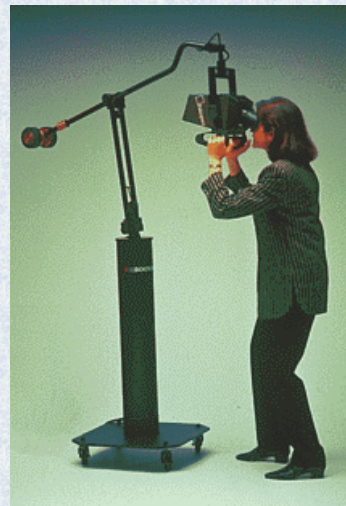




I-glasses (games)

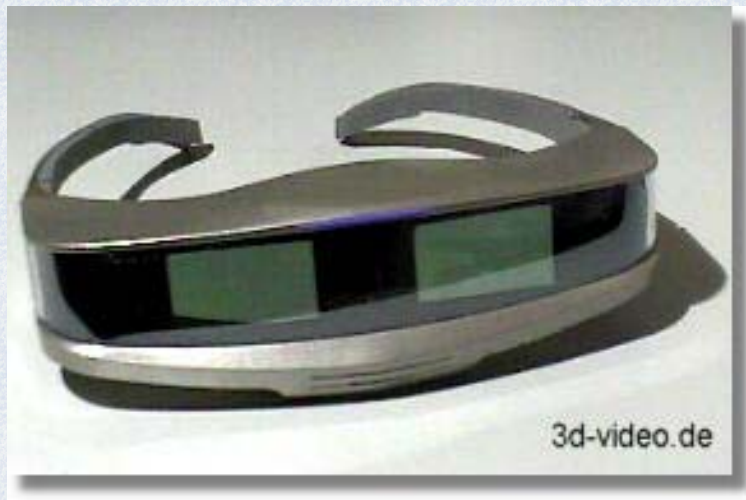

Responsive work-bench (Strauss et al., 1995)



Virtual 3D objects are positioned on a working table. They are created projecting the stereo images over the table surface.

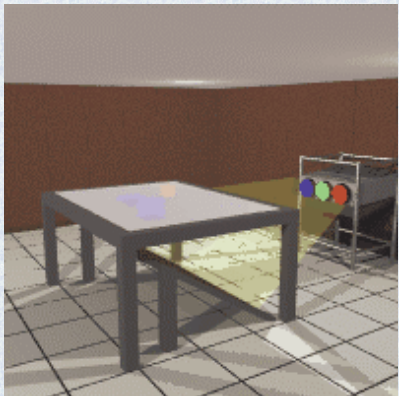



CAVE



Room 2.5m x 2.5m
with Virtual images
(stereoscopic) projected
onto its walls.

More people and
Complete immersivity.



Large screen displays



Workwall





Wearable devices



(a) HMD – 320x240 VGA

(b) Keyboard on cloth

Characteristics: mobile, context sensitive, augmented reality.



Physiological problems



- SIMM and VR sickness limit the exposure time.
- Size and distances misperception.
- Limited range in extrapersonal space.



Other output devices



Audio – Stereo, sound spatialization.

Force – Same devices which measure the force exerted by the subject.



Applications



- Army
- Industry (inspection, virtual prototyping)
- Chemistry and Physics
- Virtual theaters and theme parks
- Entertainment
- Communication
- Engineering, Ergonomics and Architecture.
- History.