

Introduzione alla Realtà Virtuale Parte II

Alberto Borghese
Applied Intelligent Systems Laboratory (AIS-Lab)
Department of Computer Science
University of Milano



1/75

<http://borghese.di.unimi.it/>



Sommario



- Introduzione
- Sistemi di Input
- **Generatori di mondi**
- Motore di calcolo
- Sistemi di Output
- Conclusioni

A.A. 2013-2014

2/75

<http://borghese.di.unimi.it/>



World generators



Integrated systems for 3D CAD and Animation:

- Maya (ex-Alias/Wavefront)
- 3D Studio Max.

OpenSource systems for graphics (also computation engine)

- Ogre3D, Blender

(Open Source) Game Engines (also computation engine)

- **Panda3D**, Unity

....



3D structure



Solid modeling

- 3D geometric solids: cubes, cylinders, cones...
- Revolution surfaces.
- Spline and NURBS (Piegle, 1993). CAD, high interactivity.
- Subdivision surfaces (Schroeder, 1999).
- Hierarchy of objects with heritage.

Rendering

- Colour and Texture
- lights => shadows.

Animation

- Motion (animation)
- Camera tracking (for augmented reality), transparencies....

Specialized systems: Finite element models

- It is a class per sé. Local modeling. Mechanical modeling.
- Largely used for animation in medicine (facial animation, deformation of tissue during surgery). Multi-layer modeling.
- Specialized SW are usually associated: Katia, AutoCAD...
- 3D Structure.

Specific CAD for mechanics: Katia, AutoCAD, Nastran SW => **Visual Computing**



SW Specifico per modellazione terreni (Terragen, reconstruction of Vajont history)



A.A. 2013-2014

5/75

<http://borghese.di.unimi.it/>



Copying from reality



- Scanners 3D
 - Active (laser or unstructured light, sound)
 - Passive (video)

A.A. 2013-2014

6/75

<http://borghese.di.unimi.it/>



3D Scanner: Autoscan - 1997



- Scansione manuale attraverso puntatore laser.
- Guida alla scansione dal feed-back su monitor.
- Flessibilità nel set-up e portabilità.
- Acquisizione spot laser in tempo reale a 100 Hz. (max 100 punti /sec)
La triangolazione diretta dei punti pone dei problemi per la presenza di rumore.

A.A. 2013-2014

7/75

<http://borghese.di.unimi.it/>



Models from range data



Cyberware whole body scanner, WB4



A.A. 2013-2014

8/75

<http://borghese.di.unimi.it/>



Models from range data (II)



Cyberware smaller model
3030



A.A. 2013-2014

9/75

<http://borghese.di.unimi.it/>



Models from range data (IV)



Digibot II.
•Platform rotates
•Scanner line translates.




A.A. 2013-2014

10/75

<http://borghese.di.unimi.it/>

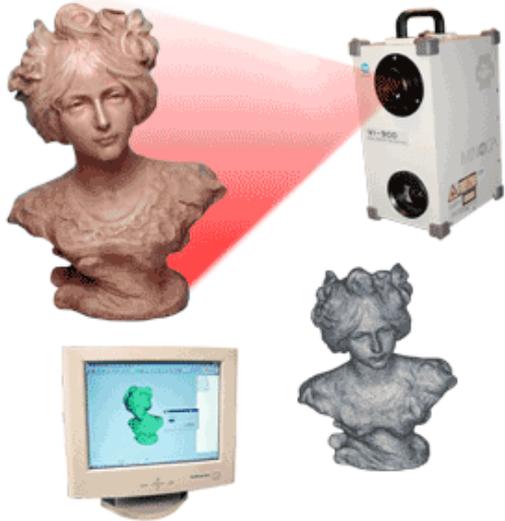

**Minolta scanner
3D**

http://kmpi.konicaminolta.us/eprise/main/kmpi/content/ISD/ISD_Category_Pages/3dscanners

A.A. 2013-2014 11/75 <http://borghese.di.unimi.it/>



3D structure from range data (III)




Polhemus hand held laser scanner

A.A. 2013-2014 12/75 <http://borghese.di.unimi.it/>



Research challenges Digital Michelangelo project



- vision problems
 - aligning and merging scans
 - automatic hole filling
 - inverse color rendering
 - automated view planning
- digital archiving problems
 - making the data last forever
 - robust 3D digital watermarking
 - indexing and searching 3D data
 - real-time viewing on low-cost PCs

A.A. 2013-2014



Video-based 3D scanner (Rusinkiewicz et al., 2002)


- A projector of stripes with pseudo-random width and a video camera
- holes can be found and filled on-the-fly
- object or scanner can be handheld / shoulderheld



video frame



range data

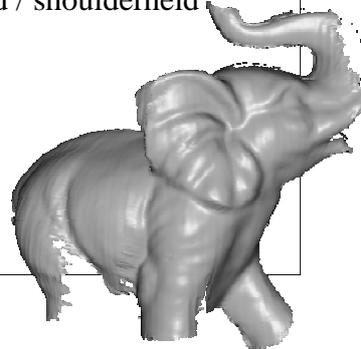

merged model
(159 frames)

A.A. 2013-2014

14/75

<http://borgese.di.unimi.it/>




Kinect fusion



Kinect fusion

<http://blogs.msdn.com/b/kinectforwindows/archive/2012/11/05/kinect-fusion-coming-to-kinect-for-windows.aspx>

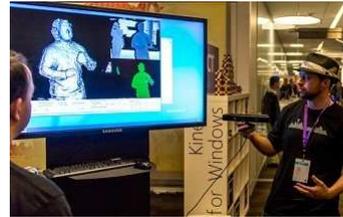

Low cost 3D modeling

KinectFusion: Real-time 3D Reconstruction and Interaction
Using a Moving Depth Camera, Izadi et al.,
Proc. Siggraph 2011

A.A. 2013-2014

15/75

<http://borghese.di.unimi.it/>



Modeling from motion



VideoFinale.mpg

Applications for smart phone


A.A. 2013-2014

16/75

<http://borghese.di.unimi.it/>



From Clouds to surfaces

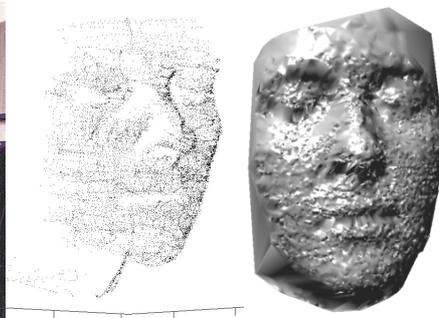

Effect of measurement noise is clear with Delaunay triangulation.
Need of filtering is evident.

A.A. 2013-2014

17/75

<http://borghese.di.unimi.it/>



3D structure from points



Linear approximation (mesh):





- Delaunay triangulation (Watson, 1981; Fang and Piegl, 1992). Direct tessellation (no filtering).
- Alpha shapes, Ball Pivoting (Bernardini et al., 2000), Power Crust (median axis transform, Amenta, 2002). Post processing to regularize a Delaunay tessellation.

Surface fitting to range data

- Snakes (Kass et al., 1988). Energy based approach. Best curves.
- Kohonen maps (1990).
- Radial Basis Functions Networks (Poggio and Girosi, 1995; Ferrari et al. 2005, semi-parametric models, incremental approach).
- Support Vector Regression (SVR, A.Smola and B.Scholkopf)



.....




A.A. 2013-2014

18/75

<http://borghese.di.unimi.it/>



Scanner 3D modern pipeline

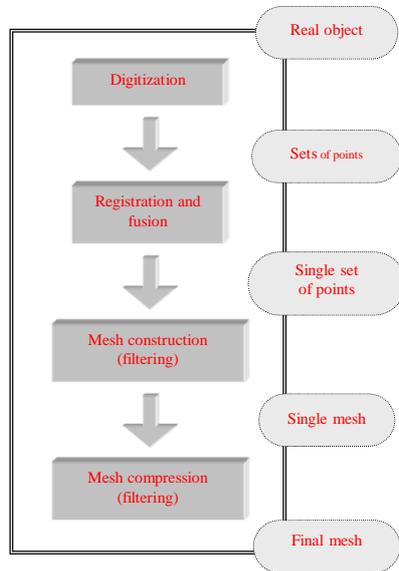

M. Levoy, S. Rusinkiewicz, M. Ginzton, J. Ginsberg, K. Pulli, D. Koller, S. Anderson, J. Shade, B. Curless, L. Pereira, J. Davis and D. Fulk, "The Digital Michelangelo Project: 3D Scanning of Large Statues," *Proc. Siggraph'99*, ACM Press, pp. 121-132, 1999



Sommario

- Introduzione
- Sistemi di Input
- Generatori di mondi
- **Motore di calcolo**
- Sistemi di Output
- Conclusioni



Graphical representation



Graphical engines represent triangles => Every shape is transformed into triangles.

- The models created by the scanners are ensembles of triangles (milions of).
- Much more than required by applications.



Mesh compression. Representation of the same geometry/pictorial attributes, with a reduced set of triangles.



OGRE3D - <http://www.ogre3d.org/>



Dynastica web browser gameplay trailer.flv



Panda3D - <http://www.panda3d.org/>



Panda3D is a game engine, a framework for 3D rendering and game development for **Python** and **C++ programs**. Panda3D is Open Source and free for any purpose, including commercial ventures, thanks to its [liberal license](#)



Managing collision detection, animation, accepting input for a wide range of devices.
It implements the game loop: reads input, changes assets (collision detection), rendering.
It loads at start time the assets that have to be created outside Panda3D (e.g. Through Maya or Blender)
(Web-cam and Kinect)

A.A. 2013-2014

<http://unity3d.com/> - Cross platform

<http://borghese.di.unimi.it>



Comparison



Comparison OGRE3D – Panda3D

	OGRE3D	Panda3D
Type	3D rendering engine	3D game engine
Language(s)	C++	C++, Python
Bindings	Python, java	
License	MIT License	BSD license
Free for commercial application	Yes	Yes
Graphics subsystem	OpenGL and Direct3D support	OpenGL and Direct3D support
OS	Win, Linux, OSX	Win, Linux, OSX
Shader support	Yes	Yes
Audio	Using external libs	Embedded (OpenAL)
Collision detection	Using external libs	Embedded
Physics system	Using external libs	Embedded (ODE)
Keyboard and Mouse support	Using OIS	Embedded
Support for I/O devices	-	Embedded
Finite state machines	-	Embedded
GUI	Using external libs	Embedded
Skeletal animation	Yes	Yes
Particle Systems	Yes	Yes

A.A. 2013-2014

24/75

<http://borghese.di.unimi.it>



VRML format



```
#VRML V2.0 utf8
Viewpoint {
  position 0 0 3
  orientation 0 0 1 0
  fieldOfView 0
}
DirectionalLight {
  intensity 0.2
  ambientIntensity 0.2
  color 0.9 0.9 0.9
  direction 0 -1 -1
}
Group {
  children Group{
    children [
      Transform {
        children Shape {
          appearance Appearance {
            material Material {
              ambientIntensity 1
              diffuseColor 0.9 0.9 0.9
              specularColor 0 0 0
              emissiveColor 0 0 0
              shininess 0
              transparency 0
            }
          }
        }
      }
    ]
  }
}
geometry IndexedFaceSet {
  coord Coordinate {
    point [
      -30.180237 -231.844711 -101.136322,
      -9.759983 -198.816086 -112.282883,
      ...
      41.981602 -72.366501 -38.740982,
      33.281391 -76.643936 -48.074211,
    ]
  }
  color Color {
    color [
      0.9 0.9 0.9,
      0.9 0.9 0.9,
      ...
      0.9 0.9 0.9,
      0.9 0.9 0.9,
    ]
  }
  coordIndex [
    10, 685, 970, -1,
    0, 1133, 1162, -1,
    ...
    263, 472, 1176, -1,
    263, 666, 1176, -1,
  ]
}
colorPerVertex TRUE
ccw TRUE
solid TRUE
creaseAngle 8
}
translation 0 0 0
center 0 0 0
scale 1 1 1
}
```


A.A. 2013-2014

25/75

<http://borghese.di.unimi.it>



LOD models

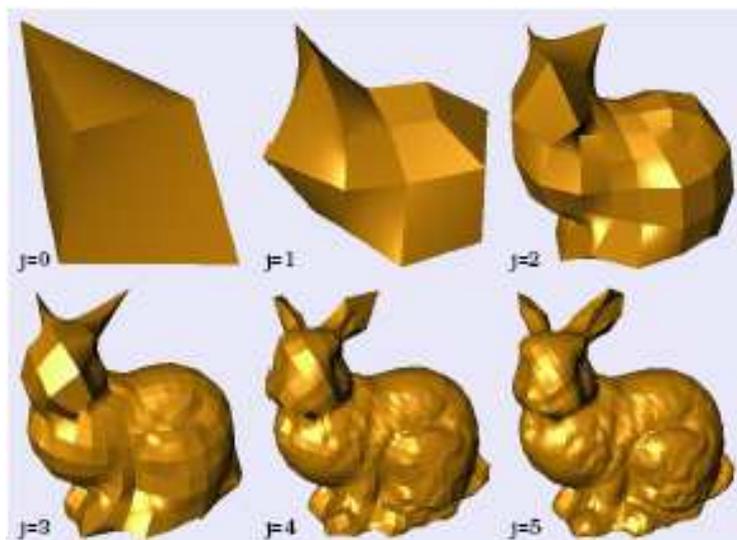

A.A. 2013-2014

26/75

<http://borghese.di.unimi.it>



The graphical engine (visual computing)



Double buffering (for real-time visualization of 3D models) + rasterization.

Interpolation of normals direction among adjacent triangles.

Graphical pipelining (geometry, colour, texture, shadowing, rendering...).

GPU programming language (CUDA nVidia).

Parallelization.

Hierarchy of structures (objects, collision detection...)

Multiple cache levels.

Look-ahead code optimization (compiler optimization).



Collision detection



Computational demanding ($O(n^2EF)$).

Use of multiresolution models.

Hierarchical detection.

- Geometry simplification (axes aligned faces).

- Check for common volumes.

- Extraction of the faces belonging to these volumes.

- Octree of the pairs of candidate faces.

- Check for intersection.



Sommario



- Introduzione
- Sistemi di Input
- Generatori di mondi
- Motore di calcolo
- **Sistemi di Output**
- Conclusioni



Haptic displays



Convey to the subject the sensorial information generated in the interaction with the virtual objects: force, material texture...

Measure the force exerted by the subject on the virtual environment.


Haptic displays provide a mechanical interface for Virtual Reality applications.

Most important developments have been made in the robotics field.

International Haptic society - <http://www.isfh.org/>



Direct drive manipulandum (phantom)

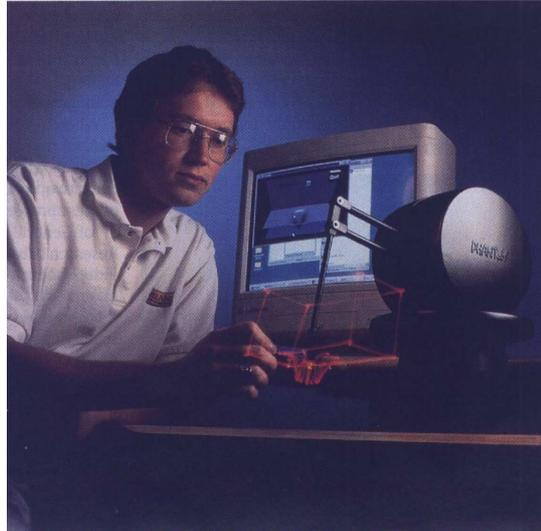

A similar device (Falcon) is available and used in our lab for rehabilitation

A.A. 2013-2014

31/75

<http://borghese.di.unimi.it/>



Haptics low cost



Omni Phantom



Novint Falcon

A.A. 2013-2014

32/75

<http://borghese.di.unimi.it/>



Requirements of Haptic displays



- Large bandwidth.
- Low inertial and viscosity.



Technological solutions (oggetto intermediario):

- Direct drive manipulandum (Yoshikawa, 1990), Phantom (2000).
- Parallel manipulandum (Millman and Colgate, 1991; Buttolo and Hannaford, 1995).
- Magnetic levitation devices (Salcudean and Yan, 1994; Gomi and Kawato, 1996).
- Gloves and esoskeleta (Bergamasco, 1993, MITmanus, 2000, Braccio di ferro, 2007).


A.A. 2013-2014

33/75

<http://borghese.di.unimi.it>

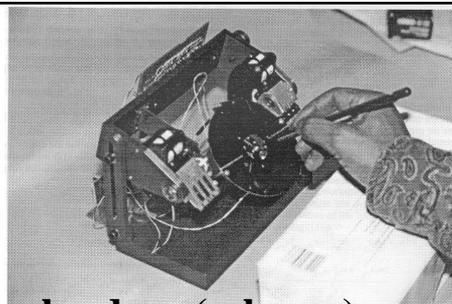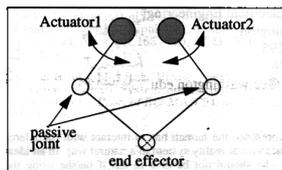


Parallel manipulandum (schema)

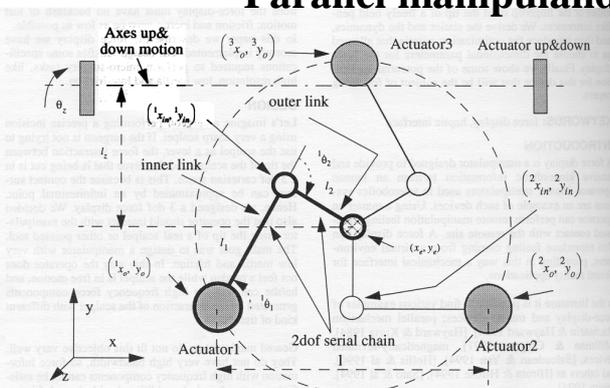

<http://borghese.di.unimi.it>



Gloves (Blackfinger, 2000)

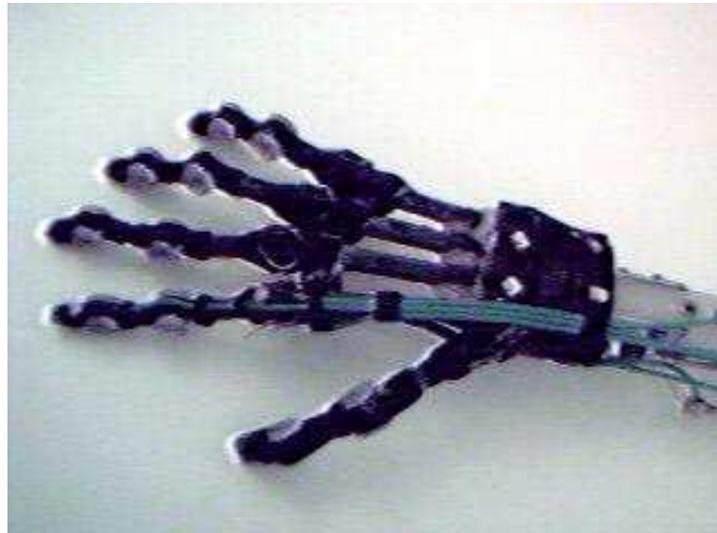

A.A. 2013-2014

35/75

<http://borghese.di.unimi.it/>



Percro glove (2002)



Sensori goniometrici – non devono essere calibrati sulla lunghezza delle falangi.

<http://www.percro.org>

A.A. 2013-2014

36/75

<http://borghese.di.unimi.it/>



MIT-Manus, 2004



Braccio di ferro, 2010



Support for the fore-arm, and generation of a force field.

A.A. 2013-2014

37/75

<http://borghese.di.unimi.it>




Other output devices



Audio – Stereo, sound spatialization.

Olfactory – Virtual nose

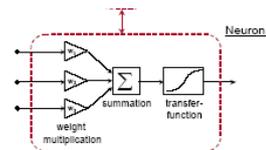

Type	Sensitive material	Detection principle
semiconducting metal oxides (M.O.S., Taguchi)	doped semiconducting metal oxides (SnO_2 , GaO)	resistance change
quartz crystal microbalance, QMB	organic or inorganic layers (gas chromatography)	frequency change due to mass change
surface acoustic wave, SAW		
conducting polymers	modified conducting polymers	resistance change
catalytic field-effect sensors (MOSFET)	catalytic metals	workfunction change
pellistor	catalysts	temperature change due to chemical reactions
fluorescence sensors	organic dyes	light intensity changes
electrochemical cells	solid or liquid electrolytes	current or voltage change
infr red sensors	-	IR absorption

A.A. 2013-2014

38/75

<http://borghese.di.unimi.it>



Stimolatori tattili



Cyber touch:

- 6 vibratori, uno per dito più 1 sul palmo
- Frequenza di vibrazione: 0-125 Hz.
- Ampiezza di vibrazione: 1.2 N @ 125 Hz (max).

Iwamoto & Shinoda
University of Tokio



A.A. 2013-2014

39/75

<http://borghese.di.unimi.it/>



Sistemi di Output::display



A.A. 2013-2014

40/75

<http://borghese.di.unimi.it/>



Optical Output systems



Requirements for the monitor:

- Large field of view ($180^\circ \times 150^\circ$).
- High spatial resolution (35 pixels/degree, equivalent to 12,000x12,000 pixels for a 19" display positioned at 70cm from the viewer).

Requirements for the world generator:

- Stereoscopic vision for objects with $D < 10m$.
- Monocular cues for objects with $D > 10m$.
 - - Occlusions.
 - - Geometrical perspective and a-priori model knowledge.
 - - Shading.
 - - Motion.


A.A. 2013-2014

41/75

<http://borghese.di.unimi.it/>



L'occhio umano

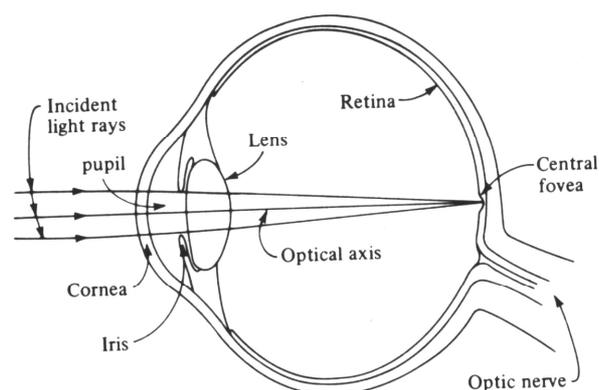

Its behavior is very similar to that of a camera


A.A. 2013-2014

42/75

<http://borghese.di.unimi.it/>



Stereo-disparity

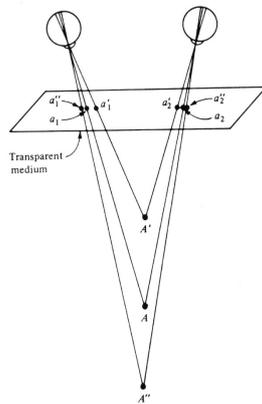

Points further away are projected on points closer to the image center.

Vergence and focusing are strictly connected.

Also monocular cues: shading, apparent size,



Passive stereo





Stereo image for passive stereo



A.A. 2013-2014

45/75

<http://borghese.di.unimi.it/>



Stereogramma con parallasse



Brevetto del 1903

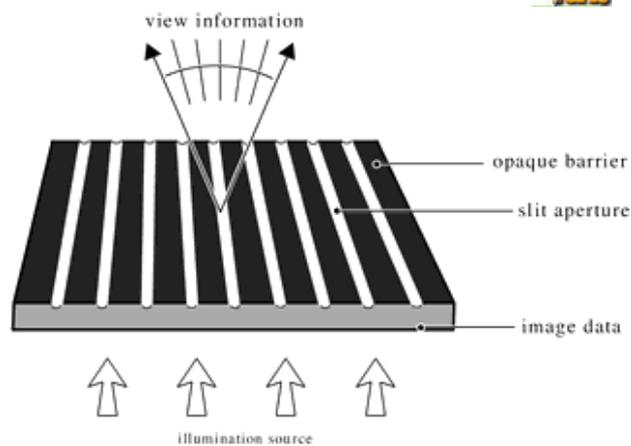


Immagine suddivisa in strisce verticali.

Coppie di strisce, associate alla parallasse orizzontale, sono posizionate in funzione dell'angolo.


A.A. 2013-2014

46/75

<http://borghese.di.unimi.it/>



Display Autostereoscopici

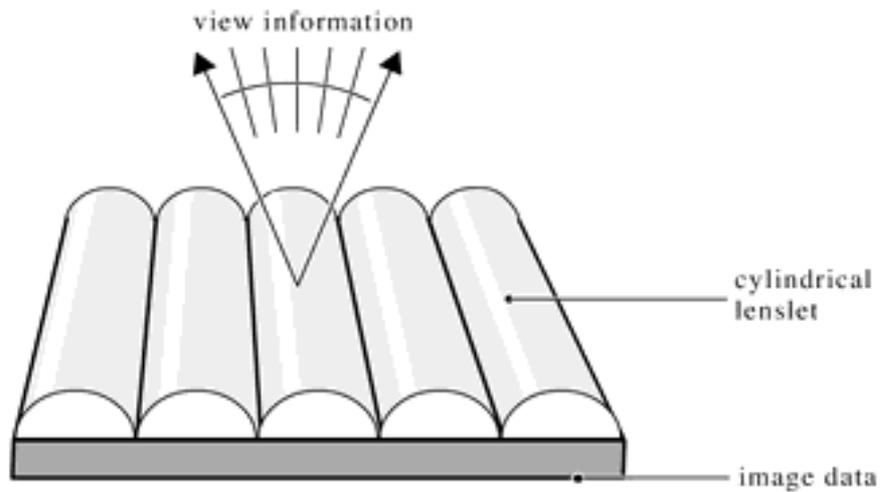

A.A. 2013-2014

47/75

<http://borghese.di.unimi.it/>



Output devices (eye-glasses)



Semi-immersive: Eye-glasses (video accuracy, but user is not allowed to move, lateral vision is permitted, which limits virtual realism).




A.A. 2013-2014

48/75

<http://borghese.di.unimi.it/>



I-glasses (games)

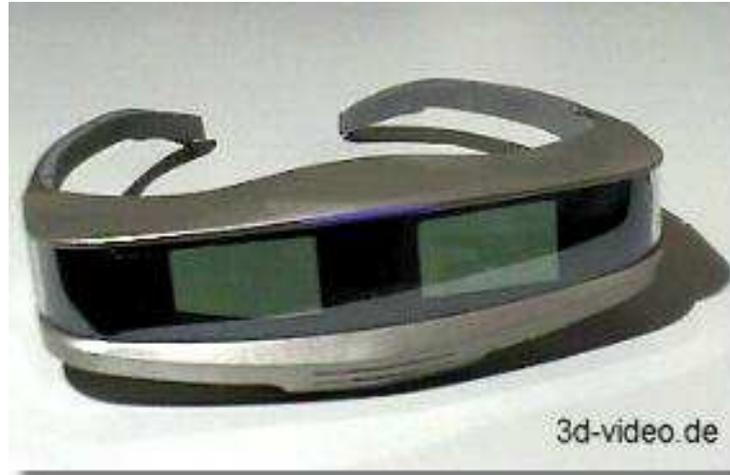

A.A. 2013-2014

49/75

<http://borghese.di.unimi.it/>



HMD (n-vision)



Up to 1280 x 1024, 180Hz.
Time multiplexing.

A.A. 2013-2014

50/75

<http://borghese.di.unimi.it/>



Output devices (BOOM HMD)



Up to 1280 x 1024 pixels / eye
CRT Technology
Head tracking is integrated.



A.A. 2013-2014

51/75

<http://borghese.di.unimi.it/>



Novel HMD: a new hype



This
Available

<http://www.oculusvr.com/>

A.A. 2013-2014

52/75

<http://borghese.di.unimi.it/>



CAVE



Room 2.5m x 2.5m
with Virtual images
(stereoscopic) projected
onto its walls.

More people and
Complete immersivity.



A.A. 2013-2014

53/75


<http://borghese.di.unimi.it/>



Responsive work-bench (Strauss et al., 1995)



Virtual 3D objects are positioned on a working table. They are
created projecting the stereo images over the table surface.

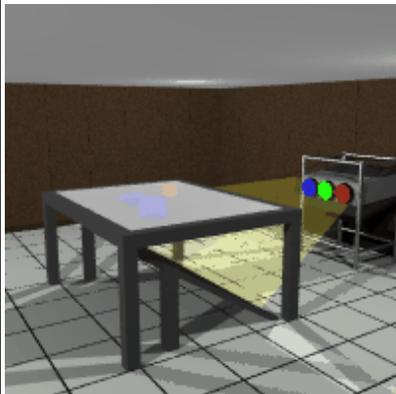

A.A. 2013-2014

54/75

<http://borghese.di.unimi.it/>



Large screen displays (with or without stereo – see Graphics Lab in Celoria)



Workwall



A.A. 2013-2014

<http://borghese.di.unimi.it>



Sommario



- Introduzione
- Sistemi di Input
- Generatori di mondi
- Motore di calcolo
- Sistemi di Output
- **Conclusioni**

A.A. 2013-2014

56/75

<http://borghese.di.unimi.it>



Applications



- Army
- Medicine
- Industry (inspection, virtual prototyping)
- Chemistry and Physics
- Virtual theaters and theme parks
- Entertainment
- Communication
- Engineering, Ergonomics and Architecture (Visual computing).
- History.



La tomba di Nefertari





Indossatrice Virtuale



Cf. Politecnico di Losanna


A.A. 2013-2014

59/75



<http://borghese.di.unimi.it/>



Wearable devices – input / output

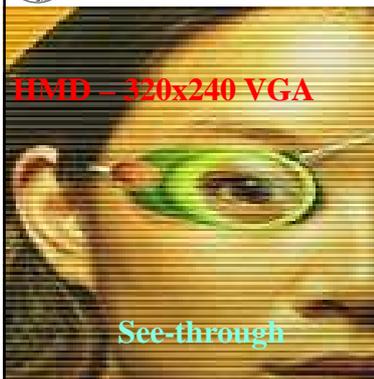

Characteristics: mobile, context sensitive, augmented reality.

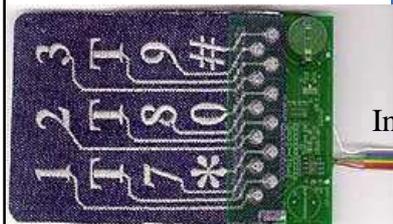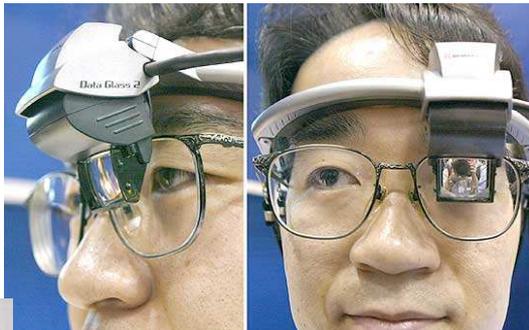

Interfaccia su stoffa.

60/75

<http://borghese.di.unimi.it/>



Progettazione: impianti virtuali




A.A. 2013-2014

61/75

<http://borghese.di.unimi.it/>



Progettazione: motori virtuali

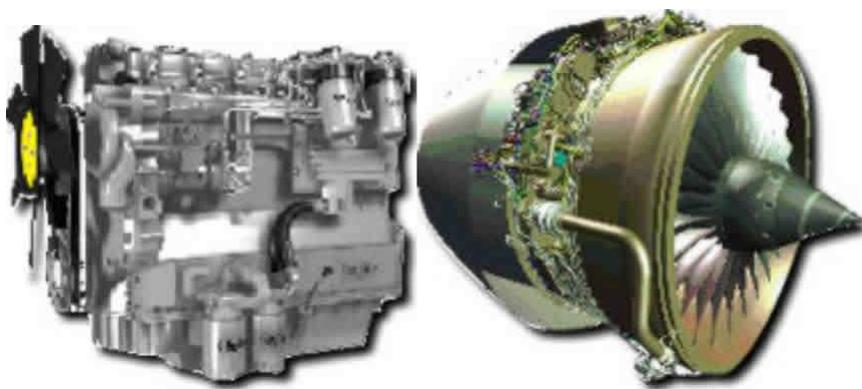



A.A. 2013-2014

62/75

<http://borghese.di.unimi.it/>



Human Factors

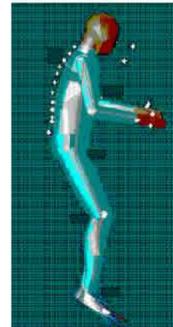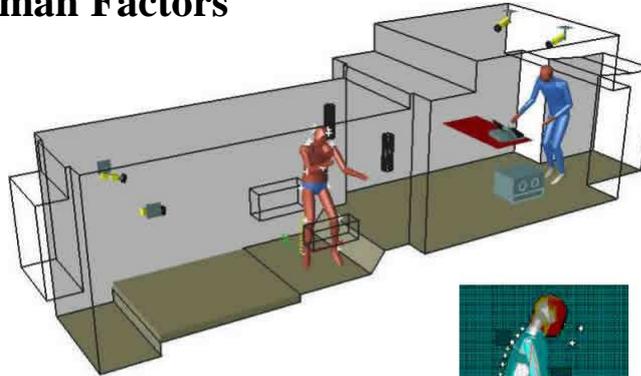



A.A. 2013-2014

63/75

<http://borghese.di.unimi.it/>



Simulazione di interventi di chirurgia mininvasiva

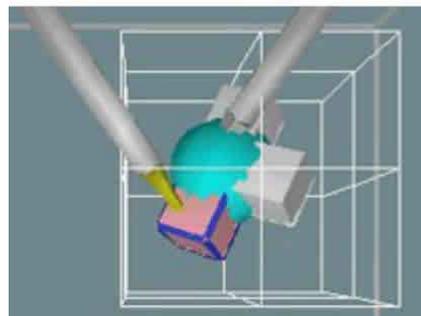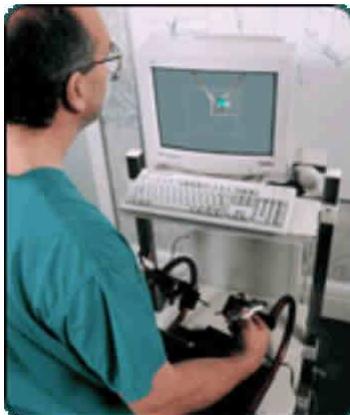



A.A. 2013-2014

64/75

<http://borghese.di.unimi.it/>



Simulazione di interventi di chirurgia mininvasiva

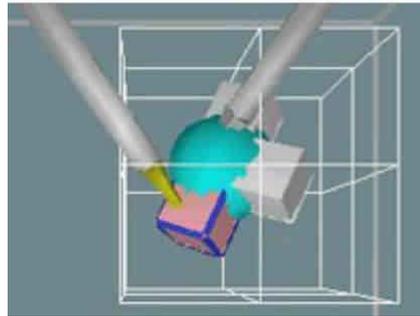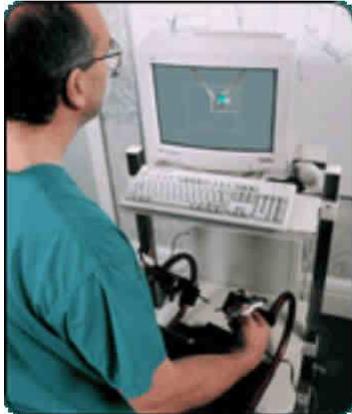




A.A. 2013-2014

65/75

<http://borghese.di.unimi.it/>



Fusione di immagini pre e intra operatorie

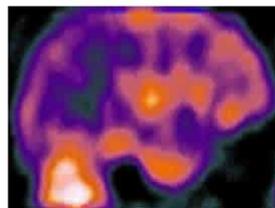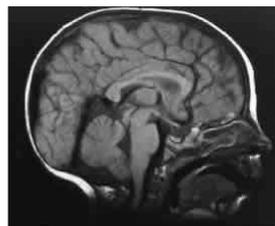

A.A. 2013-2014

66/75

<http://borghese.di.unimi.it/>



Imaging e stampanti 3D



Mandibola acrilica realizzata con tecnologia CAD-CAM a partire da scansioni TAC

A.A. 2013-2014

67/75

<http://borghese.di.unimi.it/>



Anatomia virtuale



Location: <http://corbamed.bioing.polimi.it/enet/>

Connection Term search Semantic search **Visual browsing** Constrained query

ll organ
bone
brain
eye
genital organ
gland
kidney, left
kidney, right
pancreas
parotid gland, left
parotid gland, right
prostate
suprarenal gland, le
suprarenal gland, rig
thyroid, left

Image list 10
Slice #579
Slice #580
Slice #581
Slice #582
Slice #583
Slice #584
Slice #585
Slice #586
Slice #587
Slice #588

100 kidney, left

kidney, left
is-a-kind-of gland
is-part-of urinary system
is-located-in abdomed

584

A.A. 2013-2014

68/75

<http://borghese.di.unimi.it/>



Clinical Motion Analysis




MOTION ANALYSER

FORCE TRANSDUCER

MATHEMATICAL MODELS

EMG

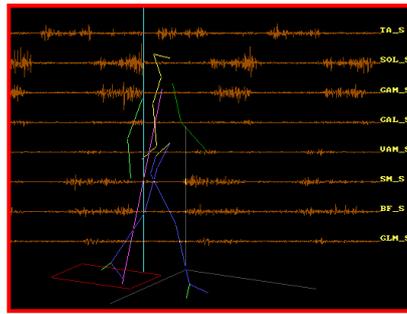

JOINT KINEMATICS

JOINT KINETICS

EXTERNAL FORCES

PLANTAR PRESSION

MUSCLE ACTIVATION AND FORCE


A.A. 2013-2014

69/75

<http://borghese.di.unimi.it>



Rehabilitation through VR: Rewire project

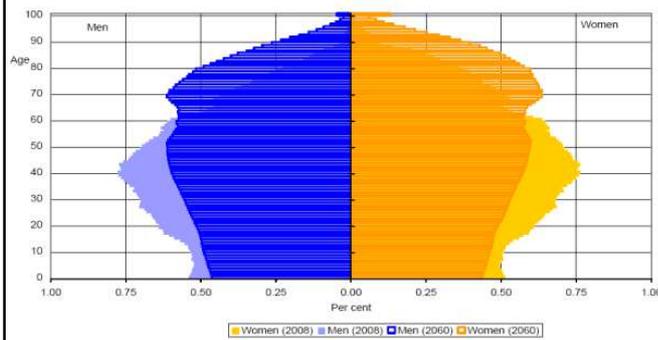

Source: Eurostat, EUROPOP2008 convergence scenario

- Increase of rehabilitation need.
- National health providers are facing budget cuts.
- Prolonged intensive rehabilitation allows recovering and/or maintaining health conditions.
- Remote patients can be addressed

ICT recent developments have made possible facing the challenge

<http://www.rewire-project.eu>



A.A. 2013-2014

70/75

<http://borghese.di.unimi.it>



REWIRE's 3-levels platform



A.A. 2013-2014

71/75

<http://borghese.di.unimi.it/>



IGER – Intelligent Game Engine for rehabilitation



- Adaptation



A.A. 2013-2014

72/75


<http://borghese.di.unimi.it/>



IGER – NUI interfacing



NUI interfacing
gestures

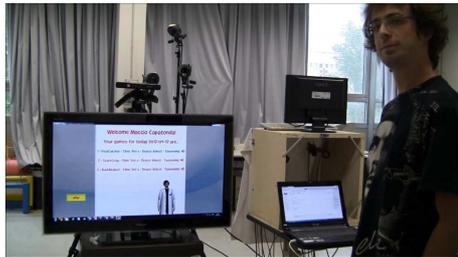

NUI interfacing
Speech recognition


A.A. 2013-2014

73/75

<http://borghese.di.unimi.it/>



Virtual Tosca



A.A. 2013-2014

74/75

<http://borghese.di.unimi.it/>



Sommario



- Introduzione
- Sistemi di Input
- Generatori di mondi
- Motore di calcolo
- Sistemi di Output
- Conclusioni